

MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com


Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® FMW11G250 – 11x2,50 mm²

FirestoP® Multiconductor Power Cable


RoHS₂
 2002/95/EC
 2011/65/UE

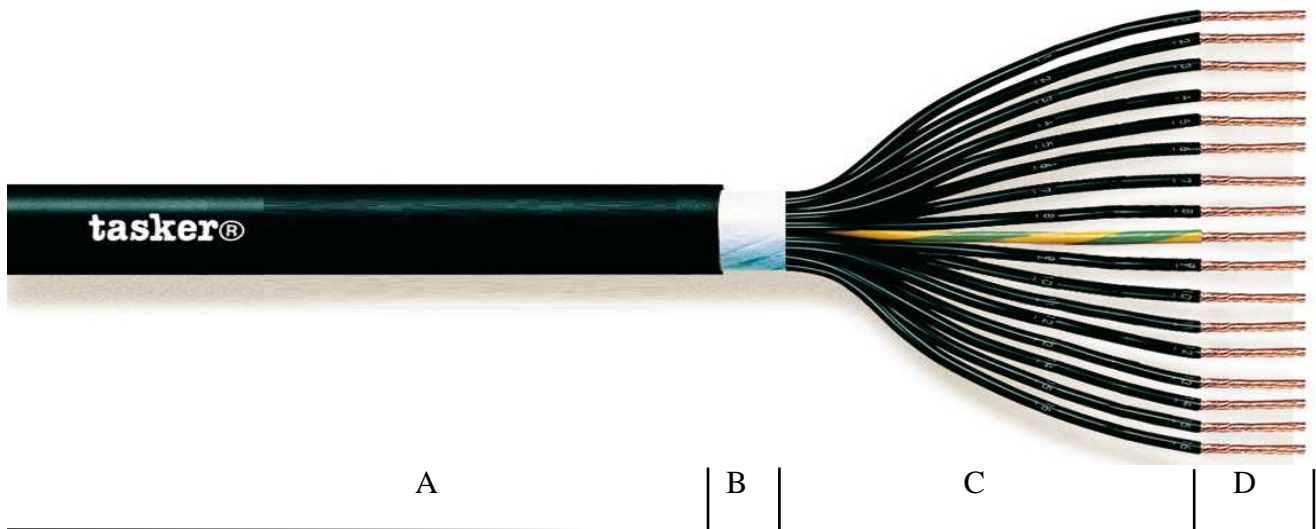

NOTE The picture don't represent the real number of conductors.
CATEGORY Power Cable (See Electronics Catalogue)
APPLICATIONS Energy and electrical installation.

- A:** Black **Flame Retardant PVC** Sheath.
Outer cable Ø: 17,80 (±0,20) mm.
- B:** The conductors are wrapped together with not woven polyester based tape.
- C:** Core Insulation with Flame Retardant **PVC** Sheath, ten are numbered and black and one is yellow/green. Nom. Diam. Ø 3,50 (±0,20) mm.
- D:** O.F.C. red copper formation with 0,20 elementary wire.
Nom. Cross section 11x2,50 mm².

MARKING tasker® FMW11G250
CUSTOM PRODUCTION This product may be custom produced also in **PVC, PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	6,41 Ω/Km
Max Rated Voltage U₀/U	300/500 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 15.02.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			