


MILAN S.r.l. a socio unico

Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet **Halogen Free** **Firestop®** **RoHS₃**
tasker® C716 L.S.Z.H. U.T.P. 4x2x0,25 mm²
Cat. 6A 10GBASE-T Ethernet Cable – UL Verified

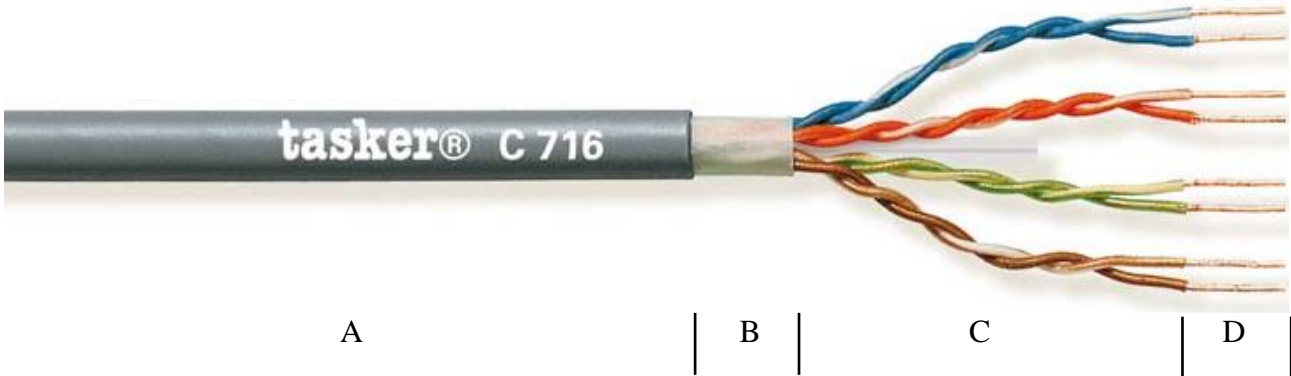

CATEGORY Cat.6A cable (See Audio or Data Network Catalogue).
APPLICATIONS High Frequency Transmission

- A:** Grey Soft **L.S.Z.H.** Sheath. RAL 7035.
Flame Retardant and without halogen. Outer cable Diam. Ø 6,20 (±0,20) mm.
- B:** The four pairs are stranded together around a central cross filler in PE and wrapped with polyester-based tape.
- C:** Insulation with PE, diam. Ø 1,00 mm, RJ45 plug connector compatible.
Core colors: White – Blue/Blue White-Orange/ Orange,
White-Green/Green, White-Brown/Brown.
- D:** Stiff Wire in O.F.C. Red Copper – 1x0,57 mm.
Nom. Cross section 4x2x0,25 mm².

MARKING **tasker® C716 U.T.P. Cat. 6A 4x2x0,25 mm² - SOLID 100Ω ETL Verified**
 TIA/EIA-568-B.2-10 - Firestop® - L.S.Z.H.

CUSTOM PRODUCTION This product may be custom produced also in **PVC, PE, PUR,** with or without Metallic Armor.

Cable Properties

Conductor Resistance	75,85 Ω/Km
Impedance	100 Ω
Max Rated Voltage	49 V
Min. bending Radius	5x Outer Ø
Operative Temperature	-30/+70°C

USE	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	INSTALLATION	<input checked="" type="checkbox"/>	Fixed	Fissa	INFORMATION	<input checked="" type="checkbox"/>	RoHS3 Compliant
Impiego	<input checked="" type="checkbox"/>	Outdoor Limited	Esterno Limitato	Posa	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	Informazioni	<input checked="" type="checkbox"/>	Ver. B / 16.04.19
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			