

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet



tasker® FROR2100 – 2x1,00 mm² Power Cable 450/750 V

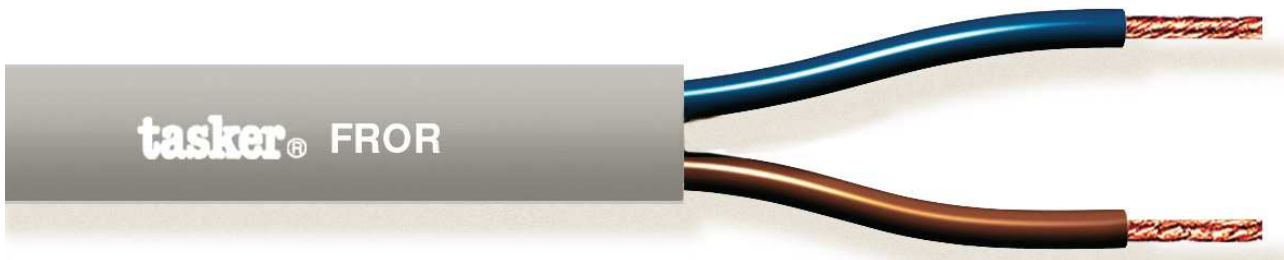

A	B	C
---	---	---

CATEGORY Power Cable (See Electronics Catalogue)
APPLICATIONS Energy and electrical installation.

- A:** Grey Flame Retardant **PVC** Sheath with reduced emission of corrosive Gases. Outer cable diam. Ø 8,70 (±0,20) mm.
- B:** Core Insulation with Flame Retardant **PVC** with reduced emission of corrosive Gases. One conductor blue and one brown. Diam. Ø 2,50 (±0,20) mm.
- C:** O.F.C. red copper formation with 0,20 mm elementary wires. Nom. Cross section 2x1,00 mm².

MARKING **tasker®** FROR 2100 2x1,00 Energy Cable - CEI 20-22/II IEMMEQU FROR 450/750V - 2x1,00 mm²

Cable Properties

Conductor Resistance	19,50 Ω/Km
Max Rated Voltage U₀/U	450/750 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			