

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet

tasker® C243 – 4x0,14 mm²

LiYCY Cable and EIA RS 232 Protocol

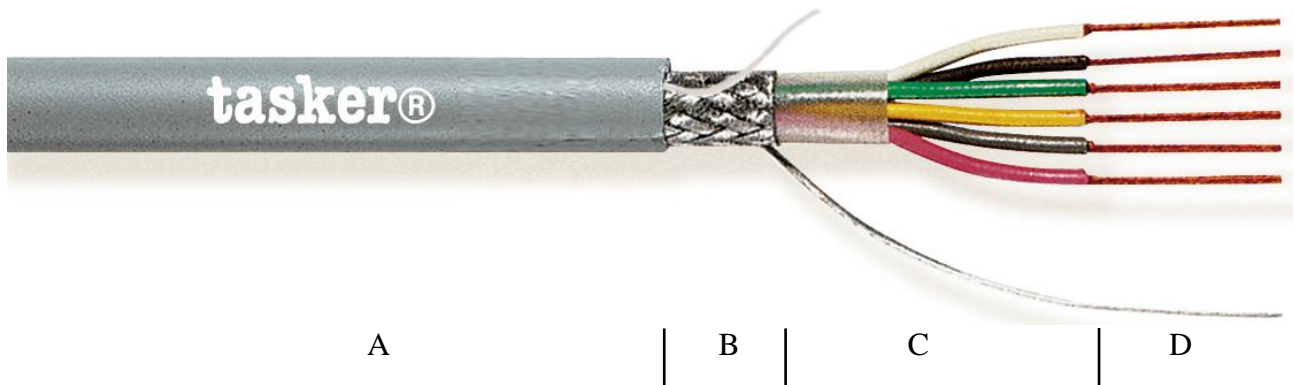

NOTE
CATEGORY
APPLICATIONS

The picture don't represent the real number of conductors
 Shielded Cable for Data (See Data Network Catalogue)
 Data transmissions and electronics

- A:** Grey Soft **PVC** Sheath. Outer cable diam. Ø 4,60 (±0,20) mm.
- B:** Braided Shielding O.F.C. Tinned Copper covering 85% + Drain Wire
- C:** Cores Insulation with Soft **PVC**. Core diam. Ø 1,10 (±0,20) mm.
 Color Code DIN 47100 Standards: White, Brown, Green, Yellow.
 Stranded with waste filler between conductors and wrapped with Mylar Tape.
- D:** Stranded O.F.C. Red Copper, formation 18x0,10 mm.
 Nom. Cross section 4x0,14 mm².

MARKING
CUSTOM
PRODUCTION

tasker® C243 LiYCY 4x0, 14 - 26 AWG LOW VOLTAGE Computer Cable Made in Italy
 This product may be custom produced also in **LSZH, PE, PUR**,
 with or without Metallic Armor.

Cable Properties

Conductor Resistance	138 Ω/Km
Capacity Core/Core	100 pF/m
Capacity Core/Shield	170 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. B / 15.11.24
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			