




Technical Datasheet

tasker® C862 – 2x2x0,35 mm²

DMX512 110 Ohm Cable – Outdoor Use ✓RoHS₃

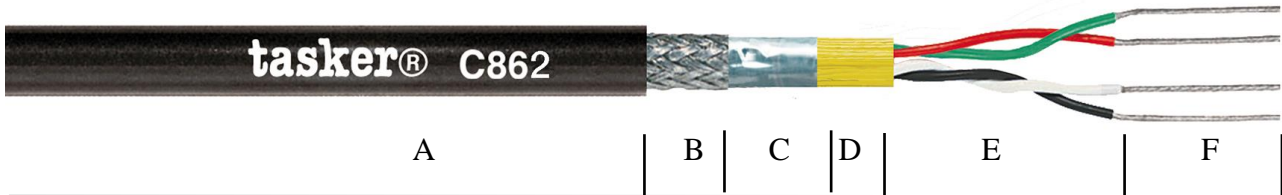

CATEGORY DMX Cable (See News Brochure)
APPLICATIONS DMX control and lights

- A:** Black Polyurethane (PUR) tubular sheath.
Flame Retardant, Halogen Free and UV, Chemical and Oil Resistant.
Outer Diam. Ø 7,50 (±0,20) mm.
- B:** First Shielding in O.F.C. tinned copper Braid covering 85%
- C:** Second Shielding with aluminum foil tape covering 100%
- D:** Aramid fiber filler between conductors.
- E:** Core Insulation in Foam PE.
Pairs Color code: Red-Green, White-Black.
Core Diam. Ø 1,52 (±0,20) mm.
- F:** O.F.C. tinned copper stranded formation 19x0,16 mm.
Nominal cross section 2x2x0,35 mm².

MARKING tasker® C862 2x2x0,35 mm² - O.F.C. ProFLEX Digital 110 Ω DMX
Cable FirestoP® - Outdoor Use - Made in Italy

CUSTOM PRODUCTION This product may be custom produced also in L.S.Z.H. polymer, PE, PVC, or Metallic Armored.

Cable Properties

Conductor Resistance	59,40 Ω/Km
Impedance	110 Ω
Test Voltage	1500 V/1 Min.
Max Rated Voltage	49 V
Min. Bending Radius	15 x O.D.
Operative Temperature	-15/+80°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS3 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. C / 18.04.2019
	X	Outdoor	Esterno		X	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			