

...a project further...

5



tasker®

Audio/Video/Broadcast Accessories

tasker[®]

trade mark of MILAN S.r.l. a socio unico

**Head Office and
Export Dept:**




20047 Cusago (MI) - Italy
Viale Europa, 74
Tel. +39 02 90 39 45 56
Tel. +39 02 90 39 00 37
Fax. +39 02 90 39 45 51

Ufficio Commerciale e
Centro Distribuzione:

20047 Cusago (MI) - Italia
Viale Europa, 72 Str. F/12
Tel. +39 02 90 39 00 37
Fax +39 02 90 39 00 49

tasker.it

MILAN[®]
tasker

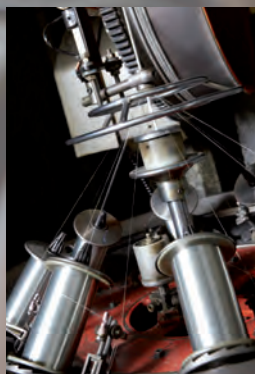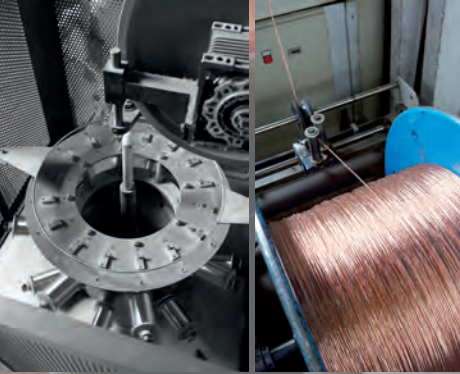



La società **Milan S.r.l. a socio unico**, unica proprietaria e fondatrice del marchio **tasker®**, è un'azienda italiana specializzata nella produzione e distribuzione di cavi di alta qualità ed altri accessori rivolti ai seguenti settori: Audio-Video professionale, Broadcast, Informatica, Elettronica, Elettromedicale, Automazione ed industriale in generale. L'alta qualità di quanto prodotto da **tasker®** è garantita da 50 anni di attività ed esperienza internazionale diretta sul campo che va dalla progettazione interna, alla successiva produzione ed infine alla distribuzione dei prodotti in tutto il mondo.

Per questo il marchio **tasker®** è da sempre indice di sicurezza e certezza di qualità.

I materiali impiegati per la costruzione dei cavi sono tutti conformi alle direttive Europee RoHS 2011/65/UE e 2015/863/UE. Inoltre tutti i processi produttivi aziendali sono periodicamente monitorati e valutati dal CSQ ed IQNet, enti internazionali di certificazione qualità, che ne verificano la conformità alla norma **UNI EN ISO 9001**.

Il costante sviluppo del reparto produttivo consente di accrescere anno dopo anno l'offerta e la disponibilità dei prodotti che ad oggi vanta oltre 5000 diversi tipi di cavi ed altri numerosi accessori, tutti disponibili in pronta consegna presso il nuovissimo centro distribuzione merci della società sito in Cusago (MI) - ITALIA.

L'aggiornamento dei prodotti è reso possibile da un reparto tecnico altamente specializzato nella progettazione delle diverse produzioni speciali che vengono realizzate periodicamente su richiesta specifica dei clienti e che riguardano cavi per applicazioni particolari piuttosto che per impieghi in ambienti e condizioni estreme come ad esempio: cavi per applicazioni mobili esterne, per particolari temperature ambientali, per le rilevazioni geologiche, per le installazioni navali, per la movimentazione industriale, armati per l'interramento, etc.

L'ufficio tecnico della **tasker®** è da sempre attento alle nuove tendenze di mercato ed agli sviluppi tecnologici ed è sempre pronto ad attivarsi sulle specifiche esigenze dei clienti per gli studi di fattibilità, progettazione ed eventuale produzione di cavi speciali come ad esempio: cavi extra-flessibili, cavi multipli oppure composti da elementi diversi (Cavi Komby), con guaine ed isolamenti particolari in Flame Retardant, in Halogen Free, Anti-olio, Anti-atriti oppure con dielettrici in Gas Injected a bassa perdita.

I quantitativi minimi richiesti per avviare una produzione speciale sono in genere a partire da soli 2/3.000 metri e possono variare a seconda della tipologia del cavo, mentre i tempi di lavorazione sono nell'ordine di 20/30 GG.

Dalla produzione del cavo, attività primaria della **tasker®**, dipende la creazione della nuova linea **tasker®LIVE**: cavi assemblati per Strumenti Musicali, Microfoni, Casse Acustiche ed applicazioni Audio/Video/Broadcast che offre una vasta scelta sia per le diverse metrature che per i colori e la varietà di modelli, oltre che alla possibilità di realizzare assemblati a richiesta e personalizzati secondo le specifiche esigenze del cliente.

Questi cavi assemblati vengono realizzati artigianalmente in Italia da personale qualificato con esperienza pluriennale, utilizzando connettori selezionati da **tasker®** ed altri di eccellente e riconosciuta qualità che vengono assemblati con i cavi Audio e Video **tasker®** per garantire alte prestazioni e basse attenuazioni.

La vasta gamma di prodotti **tasker®LIVE** (oltre 1000 diverse combinazioni) per applicazioni Audio, Video e Broadcast, vanta connessioni con spine di alto contenuto tecnologico e speciali elementi di collegamento, tutti singolarmente controllati e testati, con una forte resistenza alla trazione nei punti più critici.

I cavi **tasker®** garantiscono una trasmissione sicura ed un segnale ultra pulito, mai ottenuto prima, a partire dallo strumento musicale passando per gli effetti fino all'amplificatore.

Per maggiori informazioni e richieste particolari inviate una mail al nostro ufficio tecnico: tecnico@tasker.it o consultate il nostro sito:

www.tasker.it



The Company **Milan S.r.l. a socio unico**, sole owner and founder of the brand **tasker®**, is an Italian company specialized in the production and distribution of high quality cables and other accessories addressed to the following sectors: Professional Audio-Video, Broadcast, Computer, Electronics, Electromedical, automation and industrial in general.

The high quality of the product has been guaranteed by **tasker®** for 50 years of direct international experience in the field ranging from inner projects, to the subsequent production and finally to the worldwide distribution of products. For this reason **tasker®** brand is always index of safety and certainty of quality.

The materials used for the construction of the cables are all in accordance with European Directives RoHS 2011/65/UE and 2015/863/UE.

In addition, all processes in the company are regularly monitored and analyzed by CSQ and IQNet international quality certification bodies that verify compliance with the **UNI EN ISO 9001**.

The constant development of the production department allows to increase year after year the offer and availability of products which today boasts more than 5000 different types of cables and many other accessories, all available in stock at the new goods distribution center company located in Cusago (MI) - ITALY.

The update of the products is made possible by a highly skilled technical department in the design of several special productions which are performed periodically on specific customers' request and concerning cables for special applications rather than for use in severe and extreme conditions such as: cables for external moving applications, for particular environmental temperatures, for geological detecting, for naval installations, for industrial handling, armed for the landfill, etc.

tasker® technical department has always been sensitive to new trends and developments in technology and is always ready to be active on specific customer requirements for feasibility studies, design and possible production of special cables such as: extra-flex cables, multiple cables or composed of different elements (Komby), with sheathing and peculiar insulation in Flame Retardant, in Halogen Free, Anti-oil, Anti-friction or Gas Injected dielectric with low loss.

The minimum quantities required to start a special production are usually from only 2/3.000 meters and can change depending on the type of the cable, while the processing times are in the order of 20/30 WD.

From the cable production, **tasker®** core business, depends the creation of the new line **tasker®LIVE**: cable assemblies for Musical Instruments, Microphones, Speakers Audio/Video/Broadcast applications and offering a wide choice both for the various sizes and for the colors and variety of models, as well as the possibility of achieving assembled on request and customized according to specific customer requirements.

These assembled cables are handmade in Italy by skilled staff with years of experience, by using connectors selected by **tasker®** and other excellent and recognized quality ones, that are assembled with **tasker®** Audio and Video cables to ensure high performance and low attenuation.

The wide range of **tasker®LIVE** products (over 1,000 different combinations) for Audio, Video and Broadcast has connections with plugs and high-tech special connecting elements, all individually checked and tested, with a high tensile strength in the most critical points. **tasker®** cables provide a secure communications and an ultra clean signal, never achieved before, starting from the instrument through the effects to the amplifier.

For more information or special requests please send an email to our technical department: tecnico@tasker.it or visit our website:

www.tasker.it

tasker®



JACK connectors

solid copper from tip to tip



Anima in rame solido








AVAILABLE ONLY IN


STUDIO SERIES



XLR Connectors

3 PIN

Code	Cable Max O.D. (mm)	Packaging	Description
SPFGS3XLR SPMGS3XLR 	7,00 7,00	10 pc. 10 pc.	 Connettori maschio e femmina XLR 3 poli con contatti placcati ORO 24K-1,0µ. Isolamenti in ABS resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto, serraggi ad alta tenuta e bottone di sgancio maggiorato. Temperatura massima 200°C. Colors: Code: ● Black N ● Red R
SPFG3XLR SPMG3XLR 	7,00 7,00	10 pc. 10 pc.	Connettori maschio e femmina XLR 3 poli con contatti placcati ORO 24K-1,0µ. Isolamenti in ABS resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto e serraggi ad alta tenuta. Temperatura massima 200°C. Colors: Code: ● Black N ● Red R
SPF3XLRM SPM3XLRM 	7,00 7,00	10 pc. 10 pc.	Connettori maschio e femmina XLR 3 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci in metallo resistenti agli urti. Temperatura massima 200°C. Colors: Code: ● Black N ● Red R ● Blue B
SPF3XLR SPM3XLR 	7,00 7,00	10 pc. 10 pc.	Connettori maschio e femmina XLR 3 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto. Temperatura massima 200°C. Colors: Code: ● Black N ● Red R ● Blue B
SPF3XLRP SPM3XLRP 	7,00 7,00	10 pc. 10 pc.	Connettori maschio e femmina XLR 3 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto. Temperatura massima 200°C. Colors: Code: ● Black N ● Red R
MINIF3XLR MINIM3XLR 	4,00 4,00	10 pc. 10 pc.	Connettori maschio e femmina Mini-XLR 3 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto. Temperatura massima 200°C. Colors: Code: ● Black N ● Skin S

 XLR 3 pin male and female connectors with GOLD plated contacts 24K-1,0µ. ABS Insulations resistant to soldering and aging. Thermoplastic shells impact resistant, high performance tightening and big release button. Max temperature 200°C.

XLR 3 pin male and female connectors with GOLD plated contacts 24K-1,0µ. ABS Insulations resistant to soldering and aging. Thermoplastic shells impact resistant and high performance tightening. Max temperature 200°C.

XLR 3 pin male and female connectors. PTB Insulations resistant to soldering and aging. Metal shells impact resistant. Max temperature 200°C.


XLR 3 pin male and female connectors. PTB Insulations resistant to soldering and aging. Thermoplastic shells impact resistant. Max temperature 200°C.

XLR 3 pin male and female connectors. PTB Insulations resistant to soldering and aging. Thermoplastic shells impact resistant. Max temperature 200°C.


Mini-XLR 3 pin male and female connectors. PTB Insulations resistant to soldering and aging. Thermoplastic shells impact resistant. Max temperature 200°C.

XLR Connectors

4 PIN

Code	Cable Max O.D. (mm)	Packaging	Description
SPF4XLR SPM4XLR	7,00 7,00	10 pc. 10 pc.	 Connettori maschio e femmina XLR 4 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto. Temperatura massima 200°C.  XLR 4 pin male and female connectors. PTB Insulations resistant to soldering and aging. Thermoplastic shells impact resistant. Max temperature 200°C.
		<p>Tipo a Saldare Soldering Type</p> <p>Colors: Code: ● Black N</p>	

5 PIN


Code	Cable Max O.D. (mm)	Packaging	Description
SPF5XLR SPM5XLR	7,00 7,00	10 pc. 10 pc.	Connettori maschio e femmina XLR 5 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto. Temperatura massima 200°C. XLR 5 pin male and female connectors. PTB Insulations resistant to soldering and aging. Thermoplastic shells impact resistant. Max temperature 200°C.
		<p>Tipo a Saldare Soldering Type</p> <p>Colors: Code: ● Black N</p>	

MINIF5XLR MINIM5XLR

Code	Cable Max O.D. (mm)	Packaging	Description
MINIF5XLR MINIM5XLR	4,00 4,00	10 pc. 10 pc.	Connettori maschio e femmina Mini-XLR 5 poli. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Gusci termoplastici anti urto. Temperatura massima 200°C. Mini-XLR 5 pin male and female connectors. PTB Insulations resistant to soldering and aging. Thermoplastic shells impact resistant. Max temperature 200°C.
		<p>Tipo a Saldare Soldering Type</p> <p>Colors: Code: ● Black N ● Skin S</p>	











Jack Connectors

JACK 6.3 MONO









Code	Cable Max O.D. (mm)	Packaging	Description
ABMF6.3 ABM6.3	10,0 7,50	10 pc. 10 pc.	Connettori jack 6.3 mono maschio con punta a barra unica in rame rosso O.F.C. Cucchiaino di saldatura maggiorato per ancoraggi di grande tenuta. Indicati per applicazioni in ambito audio di potenza come ad esempio amplificatori professionali con stadio finale a valvole, dove la variazione termica risulta non trascurabile.
		<p>Tipo a Saldare Soldering Type</p> <p>Unique copper bar</p>	
SPM6.3GA SPM6.3GB	6,50 6,50	10 pc. 10 pc.	Connettori jack 6.3 mono maschio con contatti placcati ORO 24K-1,0µ. Isolamenti in PA resistenti alla saldatura e all'invecchiamento. Gusci in alluminio anti ossidamento. Temperatura massima 200°C.
		<p>Tipo a Saldare Soldering Type</p> <p>GOLD</p> <p>Colors: Code: ● Black N ● Red R</p>	
SPM6.3M SPM6.3	6,50 6,50	10 pc. 10 pc.	Connettori jack 6.3 mono maschio. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Con gusci termoplastici o in metallo resistente agli urti. Temperatura massima 200°C.
		<p>Tipo a Saldare Soldering Type</p> <p>SPM6.3M Colors: Code: ● Black N ● Green V ● Red R ● Blue B ● Yellow G ● Orange A</p> <p>SPM6.3 Colors: Code: ● Black N ● Red R ● Blue B</p>	

Jack Connectors

JACK 6.3 MONO



















Code	Cable Max O.D. (mm)	Packaging	Description
SP57	7,00	10 pc.	  <p>Tipo a Saldare Soldering Type</p>  <p>Connettore jack 6.3 mono maschio con contatti placcati ORO 24K-1,0µ. Isolamento in plastica resistenti alla saldatura e all'invecchiamento. Guscio in alluminio anti ossidamento. Temperatura massima 120°C.</p> <p>Jack 6.3 mono male connector with GOLD plated contacts 24K-1,0µ. Plastic insulation resistant to soldering and aging. Anti-oxide aluminum shell. Max temperature 120°C.</p>
AQM90 6.3	7,50	10 pc.	  <p>Tipo a Saldare Soldering Type</p> <p><i>Unique copper bar</i></p> <p>Connettore jack 6.3 mono maschio a 90° con punta a barra unica in rame rosso O.F.C. Cucchiaino di saldatura maggiorato per ancoraggi di grande tenuta. Indicati per applicazioni in ambito audio di potenza come ad esempio amplificatori professionali con stadio finale a valvole, dove la variazione termica risulta non trascurabile.</p> <p>90° Jack 6.3 mono male with unique O.F.C. copper bar. Increased welding spoon for a good anchoring mechanical seal. Advised for power audio application as for example professional amplifiers with valve section (stack), where the thermal variation results not negligible.</p>
SPM90 6.3GB	6,30	10 pc.	   <p>Connettore jack 6.3 mono maschio a 90°. Contatti placcati oro 24K-1,0µ. Indicati per applicazioni in ambito audio di potenza come ad esempio amplificatori professionali con stadio finale a valvole.</p> <p>90° Jack 6.3 mono male with gold plated contacts 24K-1µ. Advised for power audio application as for example professional amplifiers with valve section (stack).</p>
SPM90 6.3M	6,30	10 pc.	  <p>Tipo a Saldare Soldering Type</p> <p>Connettore jack 6.3 mono maschio a 90°. Isolamenti in plastica resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti-ossido. Temperatura massima 120°C.</p> <p>90° Jack 6.3 mono male connector. Plastic Insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 120°C.</p>

JACK 6.3 STEREO






Code	Cable Max O.D. (mm)	Packaging	Description
SPS6.3GB	6,50	10 pc.	  <p>Tipo a Saldare Soldering Type</p>  <p>Connettori jack 6.3 stereo maschio con contatti placcati ORO 24K-1,0µ. Isolamenti in PA resistenti alla saldatura e all'invecchiamento. Gusci in alluminio anti ossidamento. Temperatura massima 200°C.</p> <p>Jack 6.3 stereo male connectors with GOLD plated contacts 24K-1,0µ. PA Insulations resistant to soldering and aging. Anti-Oxide aluminum shells. Max temperature 200°C.</p> <p>Colors: Code:  Black N  Red R</p>
SPS6.3	6,50	10 pc.	  <p>Tipo a Saldare Soldering Type</p> <p>Connettore jack 6.3 stereo maschio. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Guscio termoplastico anti urto. Temperatura massima 200°C.</p> <p>Jack 6.3 stereo male connector. PTB Insulations resistant to soldering and aging. Thermoplastic shell impact resistant. Max temperature 200°C.</p> <p>Colors: Code:  Black N  Red R  Blue B</p>
SP58	7,00	10 pc.	   <p>Connettore jack 6.3 stereo maschio con isolamenti placcati ORO 24K-1,5µ. Isolamenti in plastica resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti-ossido. Temperatura massima 120°C.</p> <p>Jack 6.3 stereo male connector with GOLD plated contacts 24K-1,5µ. Plastic Insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 120°C.</p>

Jack Connectors














































JACK 3,5 STEREO

Code	Cable Max O.D. (mm)	Packaging	Description	
AGS3.5	8,00	10 pc.	<p>Connettore jack 3.5 stereo maschio ultra resistente. Cucchio di saldatura stagnato per facilitare la saldatura. Alloggiamento protettivo in ottone.</p>	<p> Jack 3.5 stereo male connector ultra resistant. Tin plated solder tabs to ease soldering. Solid brass housing protects the plug.</p>
				
	Tipo a Saldare Soldering Type			
SP82GB3.5S	6,50	10 pc.	<p>Connettore jack 3.5 stereo maschio con contatti placcati ORO 24K-1,0µ. Isolamenti in epikote resistenti alla saldatura e all'invecchiamento. Guscio in alluminio anti ossidamento. Temperatura massima 200°C.</p>	<p>Jack 3.5 stereo male connector with GOLD plated contacts 24K-1,0µ. epikote Insulations resistant to soldering and aging. Anti-oxide aluminum shell. Max temperature 200°C.</p>
				
	Tipo a Saldare Soldering Type			<p>Colors: Code:</p> <p> Black N</p> <p> Red R</p>
SP83GM3.5S	4,00	10 pc.	<p>Connettori jack 3.5 stereo maschio con contatti placcati ORO 24K-1,0µ. Isolamenti in epikote resistenti alla saldatura e all'invecchiamento. Gusci in alluminio anti ossidamento. Temperatura massima 200°C.</p>	<p>Jack 3.5 stereo male connectors with GOLD plated contacts 24K-1,0µ. Epikote insulations resistant to soldering and aging. Anti-oxide aluminum shells. Max temperature 200°C.</p>
SP84G3.5S	6,00	10 pc.		
				
				<p>Colors: Code:</p> <p> Black N</p> <p> Red R</p>
	Tipo a Saldare Soldering Type			
SP55	5,00	10 pc.	<p>Connettore jack 3.5 stereo maschio con contatti dorati. Isolamenti in plastica resistente alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 120°C.</p>	<p>Jack 3.5 stereo male connector with GOLD plated contacts 24K-1,0µ. Plastic insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 120°C.</p>
				
	Tipo a Saldare Soldering Type			
SP80	5,00	10 pc.	<p>Connettori jack 3.5 stereo maschio e femmina, con contatti dorati. Isolamenti in PTB resistenti alla saldatura e all'invecchiamento. Corpi in ottone e gusci in metallo anti urto. Temperatura massima 200°C.</p>	<p>Jack 3.5 stereo connectors, male and female, with gold contacts. PTB Insulations resistant to soldering and aging. Brass body and impact resistant metal shells. Max temperature 200°C.</p>
SP81	5,00	10 pc.		
				
				
	Tipo a Saldare Soldering Type			
AGS90 3.5	8,00	10 pc.	<p>Connettore jack 3.5 stereo maschio a 90° ultra resistente. Cucchio di saldatura stagnato per facilitare la saldatura. Alloggiamento protettivo in ottone.</p>	<p>90° Jack 3.5 stereo male connector ultra resistant. Tin plated solder tab for easier soldering. Solid brass housing protects the plug.</p>
				
	Tipo a Saldare Soldering Type			
















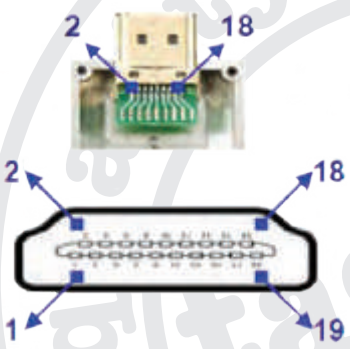
RCA Connectors

Code	Cable Max O.D. (mm)	Packaging	Description	
SP49GRCAF	6,00	10 pc.	<p>Connettori maschio e femmina RCA con contatti placcati ORO 24K-1,0µ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Gusci in metallo anti ossidamento. Temperatura massima 200°C.</p>	<p>RCA male and female connectors with GOLD plated contacts 24K-1,0µ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shells. Max temperature 200°C.</p>
SP50GRCAM	6,00	10 pc.		
				
				<p>Colors: Code:</p> <p> Black N</p> <p> Red R</p>
	Tipo a Saldare Soldering Type			





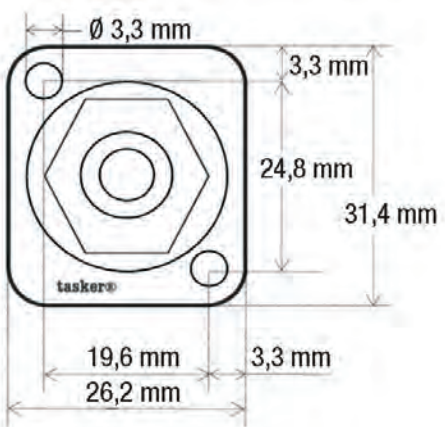










RCA Connectors

Code	Cable Max O.D. (mm)	Packaging	Description
SP51 SP52	6,70 6,70	10 pc. 10 pc.	 Connettori maschio e femmina RCA con contatti placcati ORO 24K-1,5µ. Isolamenti in plastica resistenti alla saldatura e all'invecchiamento. Gusci in metallo anti ossidamento. Temperatura massima 120°C.  RCA male and female connectors with GOLD plated contacts 24K-1,5µ. Plastic insulations resistant to soldering and aging. Anti-oxide metal shells. Max temperature 120°C.
	 <p>Tipo a Saldare Soldering Type</p> 	SP51 Colors: Code:  Red R  Blue B  Yellow G  Green V  White B	SP52 Colors: Code:  Red R  Blue B  Yellow G  Green V  White B
SP62	6,00	10 pc.	Connettore maschio RCA con contatti placcati ORO 24K-1,5µ. Isolamenti in plastica resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 120°C.
	 <p>Tipo a Saldare Soldering Type</p> 	Colors: Code:  Red R  Blue B  Yellow G  Green V  White Bi	RCA male connector with GOLD plated contacts 24K-1,5µ. Plastic insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 120°C.
SP60	8,00	10 pc.	Connettore maschio RCA con contatti placcati ORO 24K-1,5µ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 260°C.
	 <p>Tipo a Saldare Soldering Type</p> 	Colors: Code:  Red R  Blue B  Yellow G  Green V  White Bi	RCA male connector with GOLD plated contacts 24K-1,5µ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 260°C.
SP59	6,50	10 pc.	Connettore maschio RCA con contatti placcati ORO 24K-1,5µ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 260°C. Tipo a saldare sul conduttore ed a serrare sulla schermatura. Adatto per applicazioni sia audio che video.
	 <p>Tipo a Saldare Soldering Type</p> 	Colors: Code:  Red R  Blue B  Yellow G  Green V  White Bi	RCA male connector with GOLD plated contacts 24K-1,5µ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 260°C. Soldering type on the conductor and tightening on the shield. Suitable for audio and video applications.
SP61	8,00	10 pc.	Connettore maschio RCA con contatti placcati ORO 24K-1,5µ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 260°C. Tipo a saldare sul conduttore con doppio bloccaggio, schermo/guaina per garantire la massima resistenza meccanica. Connettore professionale particolarmente adatto per applicazioni audio/video.
	 <p>Tipo a Saldare Soldering Type</p> 	Colors: Code:  Black N  Red R	RCA male connector with GOLD plated contacts 24K-1,5µ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 260°C. Soldering type with double lock system shield/sheath for the maximum mechanical resistance. Professional connector suitable for audio/video applications.
 <p>Double Lock: A) Bloccaggio Cavo Cable Blocking B) Bloccaggio Innesto Clutch blocking</p>			

Video and Data Connectors

Code	Cable Max O.D. (mm)	Packaging	Description
SP56    Tipo a Saldare Soldering Type	6,00	10 pc.	Connettore BNC a 50Ω a saldare con contatti placcati ORO 24K-1,5μ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 260°C.  50Ω BNC soldering connector with GOLD plated contacts 24K-1,5μ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 260°C.
SP75   Tipo a Saldare Soldering Type	4,40	10 pc.	Connettore BNC a 75Ω a saldare con contatti placcati ORO 24K-1,5μ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 260°C. 75Ω BNC soldering connector with GOLD plated contacts 24K-1,5μ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 260°C.
SP53   	8,00	10 pc.	Connettore BNC a 75Ω a saldare con contatti placcati ORO 24K-1,5μ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in metallo anti ossidamento. Temperatura massima 260°C. 75Ω BNC soldering connector with GOLD plated contacts 24K-1,5μ. Teflon insulations resistant to soldering and aging. Anti-oxide metal shell. Max temperature 260°C.
SP76    Tipo a Crimpare Crimping Type	6,50	10 pc.	Connettore BNC a 75Ω a crimpare con contatti placcati ORO 24K-1,5μ. Isolamenti in Teflon resistenti alla saldatura e all'invecchiamento. Guscio in plastica sagomata. Temperatura massima 260°C. 75Ω BNC crimping connector with GOLD plated contacts 24K-1,5μ. Teflon insulations resistant to soldering and aging. Shaped plastic shell. Max temperature 260°C.
460    Tipo a Saldare Soldering Type	10,00	10 pc.	Connettore HDMI tipo A a saldare con contatti placcati ORO 24K-1,5μ. Isolamenti in plastica resistenti alla saldatura e all'invecchiamento. Guscio in materiale termoplastico. Type A soldering HDMI connector with GOLD plated contacts 24K-1,5μ. Plastic insulations resistant to soldering and aging. Thermoplastic material shell. 

Panel Connectors

Code	Packaging	Description
TP01 	10 pc.	 Adattatore da pannello da USB A a USB B con flangia standard tipo D. Connettore con contatti placcati oro 24K-1,0µ e corpo in metallo.  Panel Adapter from USB A to USB B with standard D shape flange. Connector with GOLD plated contacts 24K-1,0µ and metal body.
		
<p>Schema dimensionale valido per tutti gli adattatori e connettori a pannello.</p> <p>Dimensional scheme valid for all panel adapters and connectors.</p>		
		
TP02 	10 pc.	Adattatore da pannello da USB B a USB A con flangia standard tipo D. Connettore con contatti placcati oro 24K-1,0µ e corpo in metallo. Panel Adapter from USB B to USB A with standard D shape flange. Connector with GOLD plated contacts 24K-1,0µ and metal body.
		
TP10 	10 pc.	Adattatore da pannello da BNC femmina a BNC femmina con flangia standard tipo D. Connettore con contatti placcati oro 24K-1,0µ e corpo in metallo. Panel adapter BNC female to BNC female with standard D shape flange. Connector with GOLD plated contacts 24K-1,0µ and metal body.
		
TP11 	10 pc.	BNC femmina da pannello con flangia standard tipo D. Connettore a saldare con contatti placcati oro 24K-1,0µ e corpo in metallo. Panel BNC female with standard D shape flange. Soldering connector with GOLD plated contacts 24K-1,0µ and metal body.
		
<p>Tipo a Saldare Soldering Type</p>		
TP20 	10 pc.	RCA femmina da pannello con flangia standard tipo D. Connettore a saldare con contatti placcati oro 24K-1,0µ e corpo in metallo. Panel RCA female connector with standard D shape flange. Soldering connector with GOLD plated contacts 24K-1,0µ and metal body.
		
<p>Tipo a Saldare Soldering Type</p>		
<p>Colors: Code:</p> <ul style="list-style-type: none"> ● Red R ● Black N ● Yellow G ● White Bi 		
TP30 	10 pc.	Adattatore da pannello da HDMI tipo A a HDMI tipo A con flangia standard tipo D. Connettore con contatti placcati oro 24K-1,0µ e corpo in metallo. Panel Adapter from HDMI Type A to HDMI type A with standard D shape flange. Connector with GOLD plated contacts 24K-1,0µ and metal body.
		

The logo for Tasker LIVE, with 'tasker' in a lowercase sans-serif font and 'LIVE' in a larger, bold, uppercase sans-serif font, both in white with a slight shadow effect.

La nuova linea **tasker**[®]LIVE di cavi assemblati per strumenti musicali, microfoni, casse acustiche e applicazioni audio è disponibile in varie serie e lunghezze, tutte realizzate a mano in Italia con connettori e cavi di altissima qualità. Questi prodotti vi daranno la possibilità di cogliere tutte le sfumature delle vostre composizioni e brani musicali garantendo così un segnale indiscutibilmente pulito.

The New **tasker**[®]LIVE line of assembled cables for musical instruments, microphones, speakers and Audio applications is available in different sizes, all of them handmade nuances in Italy with connectors and high quality cables. All these products will give you the chance to get all the details of your compositions guaranteeing a perfectly clear signal.

Studio Series

Se sei alla ricerca della massima fedeltà audio scegli **tasker[®]!**

La serie **STUDIO** è stata pensata per chi non vuole accontentarsi, è realizzata utilizzando cavi in rame puro O.F.C. e monta connettori professionali completamente in metallo con tecnologia Tip to Tip dalla grande tenuta meccanica. Questi Jack professionali garantiscono una perfetta connessione elettrica grazie a una barra unica in rame O.F.C. che va dal "cucchiaio" di saldatura maggiorato al punto di contatto.

I nostri prodotti sono anche indicati in ambito audio di alta potenza come ad esempio gli amplificatori professionali con stadio finale a valvole dove la variazione termica risulta determinante per garantire fedeltà audio sia alle alte che alle basse frequenze.

Studio Series

If looking for the best audio fidelity, you only have one choice: choosing **tasker[®]!**

The **STUDIO** series has been designed for those who don't want to settle, is realized using pure O.F.C. copper cables and professional connectors entirely in metal with Tip to Tip technology and great mechanical seal.

These professional jack connectors guarantee a perfect electric connection thanks to a unique O.F.C. copper bar that goes from the welding spoon to the contact point. Our range of items is also advised for high power audio products such as professional amplifiers with valves final stage where the thermic variation is important to guarantee high audio fidelity in both low and high frequencies.

Premium Series

Se sei alla ricerca della massima flessibilità e precisione scegli **tasker[®]!**

La serie **PREMIUM** è stata pensata per chi vuole qualcosa di particolare, è realizzata utilizzando cavi in rame puro O.F.C. con guaine dai colori speciali estremamente morbide e flessibili. Inoltre monta speciali connettori professionali con contatti placcati oro 24K-1,0μ.

Questi prodotti sono indicati per le performance live dove vuoi dare un tocco di stile personale garantendo comunque la massima affidabilità tecnica senza però sentirti limitato nei movimenti sul palco.

Premium Series

If looking for the maximum flexibility and precision, you only have one choice: choosing **tasker[®]!**

The **PREMIUM** series is perfect for who wants something really particular, it is realized using pure O.F.C. copper cables with very special color sheaths extremely soft and flexible. They can be combined with special professional connectors with gold plated contacts 24K-1,0μ. These items are advised especially for live performances where you want to give a personal touch to the event still guaranteeing the maximum technical reliability without any limits in moving on the stage.

Classic Series

Se sei alla ricerca della massima affidabilità scegli **tasker[®]!**

La serie **CLASSIC** è stata pensata per chi vuole qualcosa di funzionale e tecnicamente ineccepibile, è realizzata utilizzando cavi in rame puro O.F.C. e da la possibilità di montare sia connettori tasker che Neutrik.

La serie classica dei cablati tasker da oltre 50 è sinonimo di affidabilità e concretezza anche grazie a un partner come Neutrik, leader mondiale nel campo Audio, che garantisce la massima resistenza, professionalità e precisione dei suoi prodotti.

Classic Series

If looking for extreme reliability, you only have one choice: choosing **tasker[®]!**

The **CLASSIC** series is advised for someone who needs a functional product also technically perfect, is realized with pure O.F.C. copper cables and gives you the possibility to put both Tasker and Neutrik connectors.

The classic series of Tasker assembled cables has been synonymous of reliability and concreteness for over 50 years, thanks also to a partner like Neutrik, leader worldwide in the Audio sector, which guarantees the maximum strength, professionalism and precision on their products.

tasker®

PROFESSIONAL CABLES

STUDIO SERIES



Premium SERIES



Classic SERIES



FOR LIVE PERFORMANCES

tasker® LIVE

STUDIO SERIES
Premium SERIES
Classic SERIES



tasker®

STUDIO SERIES



FOR YOUR STUDIO
PERFORMANCES

Tasker LIVE – Studio Series

Code	Section	Length (m)	Description
TK146SS TK149SS TK1412SS	1x0,55mm ²	6 9 12	<p>Cablato audio con jack mono professionale 6.3 maschio (ABM6.3) da ambo i lati. Cavo unipolare extra flessibile schermato a treccia + carbon screen con sezione 1x0,55 mm², disponibile nelle metrature da 6, 9 o 12 metri. Connettori in metallo con punta a barra unica in rame O.F.C.</p> <p>  Premade audio cable with both sides professional jack mono male 6.3 (ABM6.3). Extra flex unipolar cable 1x0,55 mm² with braid + carbon screen shielding available in sizes of 6, 9 or 12 meters. Metal connectors with single bar tip in O.F.C. copper. </p>
	 <p>ABM 6.3 max. ø 7,5 mm.</p>	 <p>Carbon Screen</p> <p>tasker® TSK1032</p> <p>Unique copper bar</p>	
TK156SS TK159SS TK1512SS	1x0,55mm ²	6 9 12	<p>Cablato audio con jack mono professionale 6.3 maschio (ABM6.3) e jack mono professionale 6.3 maschio a 90° (AQM906.3). Cavo unipolare extra flessibile schermato a treccia + carbon screen con sezione 1x0,55 mm², disponibile nelle metrature da 6, 9 o 12 metri. Connettori in metallo con punta a barra unica in rame O.F.C.</p> <p>Premade audio cable with professional jack mono male 6.3 (ABM6.3) and professional jack mono male 6.3 90° (AQM906.3). Extra flex unipolar cable 1x0,55 mm² with braid + carbon screen shielding available in sizes of 6, 9 or 12 meters. Metal connectors with single bar tip in O.F.C. copper.</p>
	 <p>ABM 6.3 max. ø 7,5 mm. AQM90 6.3 max. ø 7,5 mm.</p>	 <p>Carbon Screen</p> <p>tasker® TSK1032</p> <p>Unique copper bar</p>	
TK411-5SS TK413SS	2x2,50mm ²	1,5 3	<p>Cablato audio con jack mono professionale 6.3 maschio (ABMFS6.3) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x2,50 mm², disponibile nelle metrature da 1,5 o 3 metri. Connettori in metallo con punta a barra unica in rame O.F.C.</p> <p>Premade audio cable with both sides professional jack mono male 6.3 (ABMFS6.3). Extra flex double sheathed speaker cable 2x2,50 mm² available in sizes of 1,5 or 3 meters. Metal connectors with single bar tip in O.F.C. copper.</p>
	 <p>ABM FS 6.3 max. ø 10 mm.</p>	 <p>tasker® C276</p> <p>Unique copper bar</p>	
TK429SS TK4212SS	2x2,50mm ²	9 12	<p>Cablato audio con jack mono professionale 6.3 maschio (ABMFS6.3) e speakON Neutrik due poli 40A (NL2FX). Cavo cassa extra flessibile in doppia guaina con sezione 2x2,50 mm², disponibile nelle metrature da 9 o 12 metri. Jack in metallo con punta a barra unica in rame O.F.C.</p> <p>Premade audio cable with professional jack mono male 6.3 (ABMFS6.3) and 2 pole 40A Neutrik (NL2FX) speakON. Extra flex double sheathed speaker cable 2x2,50 mm² available in sizes of 9 or 12 meters. Metal jack with single bar tip in O.F.C. copper.</p>
	 <p>ABM FS 6.3 max. ø 10 mm. NL2FX max. ø 10 mm.</p>	 <p>tasker® C277</p> <p>Unique copper bar</p>	
TK431-5SS	2x1,00mm ²	1,5	<p>Cablato audio con jack mono professionale 6.3 maschio a 90° (AQM906.3) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x1,00 mm², lunghezza 1,5 metri. Connettori in metallo con punta a barra unica in rame O.F.C.</p> <p>Premade audio cable with both sides professional 90° jack mono male 6.3 (AQM906.3). Extra flex double sheathed speaker cable 2x1,00 mm², 1,5 meter length. Metal connectors with single bar tip in O.F.C. copper.</p>
	 <p>AQM90 6.3 max. ø 7,5 mm.</p>	 <p>tasker® C265</p> <p>Unique copper bar</p>	

Caratteristiche Jack Professionali

Indicati anche in ambito audio ad alta potenza come ad esempio amplificatori professionali con stadio finale a valvole, dove la variazione termica risulta non trascurabile.

Ecco le caratteristiche più importanti:

- Punta a barra unica in rame O.F.C.
- Passaggio cavo consentito fino a Ø 7,50 mm
- Cucchiaino di saldatura maggiorato per ancoraggi di grande tenuta meccanica

Professional Jack features

Particularly advised for high power audio application as for example professional amplifiers with valves section (stack), where the thermal variation results not negligible.

Below the main features:

- Head with unique O.F.C. copper bar
- Cable step up to Ø 7,50 mm
- increased welding spoon for a good anchoring

Custom production on demand



tasker Accessories 5
...a project further...

www.taskercables.com

Premium SERIES



LIVE PERFORMANCES IN **FLUO** COLORS

Tasker LIVE – Premium Series



Code	Section	Length (m)	Description
TK123PSF	1x0,50mm ²	3	 Cablato audio con jack mono 6.3 maschio placcato oro (SPM6.3GB-N) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm ² , disponibile nelle metrature da 3,6, 9 o 12 metri.
TK126PSF		6	
TK129PSF		9	
TK1212PSF		12	



SPM6.3GB-N
max. ø 6,5 mm.



Colors:	Code:
Fluo Blue	B
Fluo Green	V
Fluo Yellow	G
Fluo Orange	A
Trasparent Bronze	TB

TK113PSF
TK116PSF
TK119PSF
TK1112PSF

Section	Length (m)
1x0,50mm ²	3
	6
	9
	12

Cablato audio con jack mono 6.3 maschio a 90° (SPM906.3M) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², disponibile nelle metrature da 3,6, 9 o 12 metri.

Premade audio cable with both sides 90° jack mono male 6.3 (SPM906.3M). Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, available in sizes of 3,6, 9 or 12 meters.



SPFG3XLR-N
max. ø 6,3 mm.



Colors:	Code:
Fluo Blue	B
Fluo Green	V
Fluo Yellow	G
Fluo Orange	A
Trasparent Bronze	TB

TK501PSF

Section	Length (m)
1x0,50mm ²	1

Cablato audio con RCA maschio placcato oro (SP50GRCAM-N) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², lunghezza 1 metro.

Premade audio cable with both sides gold plated male RCA (SP50GRCAM-N). Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, 1 meter length.



SP50GRCAM-N
max. ø 6 mm.



Colors:	Code:
Fluo Blue	B
Fluo Green	V
Fluo Yellow	G
Fluo Orange	A
Trasparent Bronze	TB

TK521PSF

Section	Length (m)
1x0,50mm ²	1

Cablato audio con RCA femmina placcato oro (SP49GRCAF-N) da ambo i lati. Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², lunghezza 1 metro.

Premade audio cable with both sides gold plated female RCA (SP49GRCAF-N). Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, 1 meter length.



SP49GRCAF-N
max. ø 6 mm.



Colors:	Code:
Fluo Blue	B
Fluo Green	V
Fluo Yellow	G
Fluo Orange	A
Trasparent Bronze	TB

Custom production on demand



tasker



...a project further...

Accessories 5

www.taskercables.com

Tasker LIVE – Premium Series



Code	Section	Length (m)	Description
TK511PSF	1x0,50mm ²	1	<p> Cablato audio RCA maschio placcato oro (SP50GRCAM-N) e RCA femmina placcato oro (SP49GRCAF-N). Cavo unipolare extra flessibile schermato a spirale + carbon screen con sezione 1x0,50 mm², lunghezza 1 metro.</p> <p> Premade audio cable with gold plated male RCA (SP50GRCAM-N) and gold plated female RCA (SP49GRCAF-N). Extra flex unipolar cable 1x0,50 mm² with spiral + carbon screen shielding, 1 meter length.</p>
TK223PSF TK226PSF TK229PSF TK2212PSF	2x0,22mm ²	3 6 9 12	<p>Cablato audio con jack mono 6.3 maschio placcato oro (SPM6.3GB-N) e XLR 3 poli femmina placcato oro (SPFG3XLR-N). Cavo bilanciato extra flessibile 2x0,22 mm² schermato nelle metrature da 3, 6, 9, 12 metri.</p> <p>Premade audio cable with gold plated jack mono male 6.3 (SPM6.3GB-N) and gold plated 3 pin female XLR (SPFG3XLR-N). Extra flex shielded balanced cable 2x0,22 mm² available in sizes of 3, 6, 9, 12 meters.</p>
TK333PSF TK336PSF TK339PSF TK3312PSF	2x0,22mm ²	3 6 9 12	<p>Cablato con XLR 3 poli femmina placcato oro (SPFG3XLR-N) e XLR 3 poli maschio placcato oro (SPMG3XLR). Cavo bilanciato extra flessibile 2x0,22 mm² schermato nelle metrature da 3, 6, 9, 12 metri.</p> <p>Premade audio cable with gold plated 3 pin female XLR (SPFG3XLR-N) to gold plated 3 pin male XLR (SPMG3XLR). Extra flex shielded balanced cable 2x0,22 mm² available in sizes of 3, 6, 9, 12 meters.</p>
TK172PSF TK173PSF	2x0,22mm ²	2 3	<p>Cablato audio con jack 3.5 stereo placcato oro (SP82GB3,5S-N) da ambo i lati. Cavo bilanciato extra flessibile 2x0,22 mm² schermato nelle metrature da 2 e 3 metri.</p> <p>Premade audio cable with both sides gold plated jack 3.5 stereo (SP82GB3,5S-N). Extra flex shielded balanced cable 2x0,22 mm² available in sizes of 2 or 3 meters.</p>



- Colors:**
- Fluo Blue
 - Fluo Green
 - Fluo Yellow
 - Fluo Orange
 - Trasparent Bronze
- Code:**
- B
 - V
 - G
 - A
 - TB



- Colors:**
- Fluo Blue
 - Fluo Green
 - Fluo Yellow
 - Fluo Orange
 - Trasparent Bronze
- Code:**
- B
 - V
 - G
 - A
 - TB



- Colors:**
- Fluo Blue
 - Fluo Green
 - Fluo Yellow
 - Fluo Orange
 - Trasparent Bronze
- Code:**
- B
 - V
 - G
 - A
 - TB



- Colors:**
- Fluo Blue
 - Fluo Green
 - Fluo Yellow
 - Fluo Orange
 - Trasparent Bronze
- Code:**
- B
 - V
 - G
 - A
 - TB

Custom production on demand



tasker® *Classic* SERIES





Quality

For Your

EARS

Tasker LIVE – Classic Series

AUDIO PREMADE CABLES WITH TASKER CONNECTORS

Code	Section	Length (m)	Description
TK133 TK136 TK139 TK1312	2x0,22 mm ²	3 6 9 12	<p> Cablato audio con jack mono 6.3 maschio (SPM6.3M) da ambo i lati. Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> <p> Premade audio cable with both sides jack mono male 6.3 (SPM6.3M). Balanced cable 2x0,22 mm² available in sizes of 3, 6, 9 or 12 meters. Metal shell connectors impact resistant.</p>
TK233 TK236 TK239 TK2312	2x0,22 mm ²	3 6 9 12	<p>Cablato audio con jack mono 6.3 maschio (SPM6.3M) e XLR 3 poli femmina (SPF3XLRM). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> <p>Premade audio cable with jack mono male 6.3 (SPM6.3M) and female XLR 3 pin (SPF3XLRM). Balanced cable 2x0,22 mm² available in sizes of 3, 6, 9 or 12 meters. Metal shell connectors impact resistant.</p>
TK343 TK346 TK349 TK3412	2x0,22 mm ²	3 6 9 12	<p>Cablato audio con XLR 3 poli maschio (SPM3XLRM) e XLR 3 poli femmina (SPF3XLRM). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> <p>Premade audio cable with male XLR 3 pin (SPM3XLRM) and female XLR 3 pin (SPF3XLRM). Balanced cable 2x0,22 mm² available in sizes of 3, 6, 9 or 12 meters. Metal shell connectors impact resistant.</p>
TK113 TK116 TK119 TK1112	1x0,50 mm ²	3 6 9 12	<p>Cablato audio con jack mono 6.3 maschio (SPM6.3M) e jack mono 6.3 maschio a 90° (SPM906.3M). Cavo unipolare schermato 1x0,50 mm² con carbon screen, disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> <p>Premade audio cable with jack mono male 6.3 (SPM6.3M) and 90° jack mono male 6.3 (SPM906.3M). Shielded unipolar cable 1x0,50 mm² with carbon screen, available in sizes of 3, 6, 9 or 12 meters. Metal shell connectors impact resistant.</p>



Custom production on demand



tasker

...a project further...

Accessories 5

www.tasker.it

Tasker LIVE – Classic Series

AUDIO PREMADE CABLES WITH TASKER CONNECTORS

Code	Section	Length (m)	Description
TK123 TK126 TK1212	2x0,22 mm ²	3 6 12	<p> Cablato audio con jack mono 6.3 maschio (SPM6.3) da ambo i lati. Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo termoplastici anti urto.</p> <p> Premade audio cable with both sides jack mono male 6.3 (SPM6.3). Balanced cable 2x0,22 mm² available in sizes of 3, 6, 9 or 12 meters. Connectors with thermoplastic shells impact resistant.</p>
  <p>SPM6.3 max. ø 6,5 mm.</p> 			
TK223 TK226 TK2212	2x0,22 mm ²	3 6 12	<p>Cablato audio con jack mono 6.3 maschio (SPM6.3) e XLR 3 poli femmina (SPF3XLR). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6 o 12 metri. Connettori con corpo termoplastici anti urto.</p> <p>Premade audio cable with jack mono male 6.3 (SPM6.3) and female XLR 3 pin (SPF3XLR). Balanced cable 2x0,22 mm² available in sizes of 3, 6 or 12 meters. Connectors with thermoplastic shells impact resistant.</p>
  <p>SPM6.3 max. ø 6,5 mm. SPF3XLR max. ø 7 mm.</p> 			
TK333 TK336 TK339 TK3312	2x0,22 mm ²	3 6 9 12	<p>Cablato audio con XLR 3 poli maschio (SPM3XLR) e XLR 3 poli femmina (SPF3XLR). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo termoplastici anti urto.</p> <p>Premade audio cable with male XLR 3 pin (SPM3XLR) and female XLR 3 pin (SPF3XLR). Balanced cable 2x0,22 mm² available in sizes of 3, 6, 9 or 12 meters. Connectors with thermoplastic shells impact resistant.</p>
  <p>SPF3XLR max. ø 7 mm. SPM3XLR max. ø 7 mm.</p> 			
TK075 TK080 TK085	2x0,08 mm ²	1,5 3 6	<p>Cablato audio con jack stereo 6.3 maschio e XLR 3 poli maschio. Cavo 2x0,08 mm² disponibile nelle metrature da 1.5, 3, 6 metri. Connettori con corpo in metallo resistente agli urti.</p> <p>Premade audio cable with jack stereo male 6.3 and male XLR 3 pin. 2x0,08 mm² cable available in sizes of 1.5, 3, 6 meters. Metal shell connectors impact resistant.</p>
  			

Custom production on demand



AZIENDA CERTIFICATA UNI EN ISO 9001



RoHS2 2002/95/EC 2011/65/UE



tasker



...a project further...

Accessories 5

www.taskercables.com

Tasker LIVE – Classic Series

AUDIO PREMADE CABLES WITH TASKER CONNECTORS

Code	Section	Length (m)	Description
TK050	2x0,15 mm ²	1,5	<p> Cablato audio con jack stereo 3.5 maschio e 2 jack mono 6.3 maschio. Cavo 2x0,15 mm² da 1.5 metri con connettori in metallo resistente agli urti.</p> <p> Premade audio cable with jack stereo male 3.5 and 2 male jack mono 6.3. 2x0,15 mm² cable of 1.5 meters with metal shell connectors impact resistant.</p>



TK060	2x0,08 mm ²	1,5	<p>Cablato audio con jack stereo 3.5 maschio e 2 RCA maschio. Cavo 2x0,08 mm² da 1.5 metri con connettori in metallo resistente agli urti.</p> <p>Premade audio cable with jack stereo male 3.5 and 2 male RCA. 2x0,08 mm² cable of 1.5 meters with metal shell connectors impact resistant.</p>
-------	------------------------	-----	--



TK055	2x0,08 mm ²	1,5	<p>Cablato audio con jack stereo 3.5 maschio e XLR 3 poli maschio. Cavo 2x0,08 mm² da 1.5 metri con connettori in metallo resistente agli urti.</p> <p>Premade audio cable with jack stereo male 3.5 and male XLR 3 pin. 2x0,08 mm² cable of 1.5 meters with metal shell connectors impact resistant.</p>
-------	------------------------	-----	---



TK065	3x0,08 mm ²	1,5	<p>Cablato audio con porta USB di tipo C e 2 connettori RCA maschio. Cavo 3x0,08 mm² da 1.5 metri con connettori in metallo resistente agli urti.</p> <p>Premade audio cable with USB type C and 2 male RCA. 3x0,08 mm² cable of 1 meter with metal shell connectors impact resistant.</p>
-------	------------------------	-----	--



Custom production on demand



AZIENDA CERTIFICATA UNI EN ISO 9001



RoHS 2002/95/EC 2011/65/EU



OFC COPPER

tasker

...a project further...

Accessories 5

www.taskercables.com

25

Tasker LIVE – Classic Series

AUDIO PREMADE CABLES WITH NEUTRIK CONNECTORS

Code	Section	Length (m)	Description
NK113 NK116 NK119 NK1112	1x0,50 mm ²	3 6 9 12	   <p>Cablato audio con jack mono 6.3 maschio (NP2X) e jack mono 6.3 maschio a 90° (NP2RX). Cavo unipolare schermato 1x0,50 mm² con carbon screen, disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> <p> Carbon Screen</p> 
NK133 NK136 NK139 NK1312	2x0,22 mm ²	3 6 9 12	  <p>Cablato audio con jack mono 6.3 maschio (NP2X) da ambo i lati. Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> 
NK223 NK226 NK229 NK2212	2x0,22 mm ²	3 6 9 12	   <p>Cablato audio con jack mono 6.3 maschio (NP2X) e XLR 3 poli femmina (NC3FXF). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> 
NK333 NK336 NK339 NK3312	2x0,22 mm ²	3 6 9 12	   <p>Cablato audio con XLR 3 poli maschio (NC3MXX) e XLR 3 poli femmina (NC3FXF). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> 
NK123 NK126 NK129 NK1212	2x0,22 mm ²	3 6 9 12	   <p>Cablato audio con jack mono 6.3 maschio (NP2X) e jack mono 6.3 maschio a 90° (NP2RX). Cavo bilanciato 2x0,22 mm² disponibile nelle metrature da 3, 6, 9 o 12 metri. Connettori con corpo in metallo resistente agli urti.</p> 

Custom production on demand



tasker

...a project further...

Accessories 5

www.taskertables.com

Tasker LIVE – Classic Series

AUDIO PREMADE CABLES FOR SPEAKERS

Code	Section	Length (m)	Description	
TK403	2x18 AWG	3	Cablato di potenza con jack mono 6.3 maschio (SPM6.3M) e SpeakON 2 poli 40A (NL2FX). Cavo 2x18 AWG disponibile nelle metrature da 3, 6, 9 o 12 metri.	Premade audio cable with jack mono male 6.3 (SPM6.3M) and SpeakON 2 Pin 40A (NL2FX). 2x18 AWG cable available in sizes of 3, 6, 9 or 12 meters.
TK406		6		
TK409		9		
TK4012		12		



NK403	2x16 AWG	3	Cablato di potenza con jack mono 6.3 maschio (NP2X) e SpeakON 2 poli 40A (NL2FX). Cavo 2x16 AWG disponibile nelle metrature da 3, 6, 9 o 12 metri.	Premade audio cable with jack mono male 6.3 (NP2X) and SpeakON 2 Pin 40A (NL2FX). 2x16 AWG cable available in sizes of 3, 6, 9 or 12 meters.
NK406		6		
NK409		9		
NK4012		12		



RF513	2x1,00 mm ²	3	Cablato di potenza con SpeakON 2 poli 40A (NL2FX) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x1,00 mm ² disponibile nelle metrature da 3, 6, 9, 12, 15 o 20 metri.	Premade audio cable with SpeakON 2 Pin 40A (NL2FX) on both sides. Extra flex double sheathed speaker cable 2x1,00 mm ² available in sizes of 3, 6, 9, 12, 15 or 20 meters.
RF516		6		
RF519		9		
RF5112		12		
RF5115		15		
RF5120		20		



RF523	2x2,00 mm ²	3	Cablato di potenza con SpeakON 2 poli 40A (NL2FX) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x2,00 mm ² disponibile nelle metrature da 3, 6, 9, 12, 15 o 20 metri.	Premade power cable with SpeakON 2 pin 40A (NL2FX) on both sides. Extra flex double sheathed speaker cable 2x2,00 mm ² available in sizes of 3, 6, 9, 12, 15 or 20 meters.
RF526		6		
RF529		9		
RF5212		12		
RF5215		15		
RF5220		20		



Custom production on demand



tasker

...a project further...


Accessories 5


www.taskercables.com

27

Tasker LIVE – Classic Series

AUDIO PREMADE CABLES FOR SPEAKERS

Code	Section	Length (m)	Description
RF533	2x3,00 mm ²	3	 Cablato di potenza con SpeakON 2 poli 40A (NL2FX) da ambo i lati. Cavo cassa extra flessibile in doppia guaina con sezione 2x3,00 mm ² disponibile nelle metrature da 3, 6, 9, 12, 15, 20, 25 o 30 metri.
RF536		6	
RF539		9	
RF5312		12	
RF5315		15	
RF5320		20	
RF5325		25	
RF5330	30		

 Premade power cable with SpeakON 2 Pin 40A (NL2FX) on both sides. Extra flex double sheathed speaker cable 2x3,00 mm² available in sizes of 3, 6, 9, 12, 15, 20, 25 or 30 meters.



NL2FX
max. ø 14,5 mm.



RF543	2x1,50+2x2,50 mm ²	3	Cablato di potenza con SpeakON 4 poli 30A (NL4FC) da ambo i lati. Cavo cassa extra flessibile con sezione 2x1,50+2x2,50 mm ² disponibile nelle metrature da 3, 6, 9, 12, 15 o 20 metri.
RF546		6	
RF549		9	
RF5412		12	
RF5415		15	
RF5420		20	

Premade power cable with SpeakON 4 Pin 30A (NL4FC) on both sides. Extra flex speaker cable 2x1,50+2x2,50 mm² available in sizes of 3, 6, 9, 12, 15 or 20 meters.



NL4FC
max. ø 15 mm.



RF553	4x4,00 mm ²	3	Cablato di potenza con SpeakON 4 poli 40A (NL4FX) da ambo i lati. Cavo cassa extra flessibile con sezione 4x4,00 mm ² disponibile nelle metrature da 3, 6, 9, 12, 15, 20, 25 o 30 metri.
RF556		6	
RF559		9	
RF5512		12	
RF5515		15	
RF5520		20	
RF5525		25	
RF5530	30		

Premade power cable with SpeakON 4 Pin 40A (NL4FX) on both sides. Extra flex speaker cable 4x4,00 mm² available in sizes of 3, 6, 9, 12, 15, 20, 25 or 30 meters.












NL4FX
max. ø 14,5 mm.





New DMX and power premade cables for active loudspeakers and stage light equipment



Cable	Length (m)	Code	Section	Connectors	Description	
C283 Soft	1	PC8333DSPW-1	1x2x0,22 mm ²	NC3MXX-B NAC3MX-W-TOP	 	 <p>Cablato audio digitale DMX 110 ohm con cavo di alimentazione integrato, connettori professionali XLR 3 poli e PowerCON Neutrik.</p>
	2	PC8333DSPW-2	+3x1,50 mm ²			
C284 Soft	1	PC8433DSPW-1	2x2x0,22 mm ²	2xNC3MXX-B NAC3MX-W-TOP	 	 <p>Cablato audio digitale DMX 110 ohm con cavo di alimentazione integrato, connettori professionali XLR 3 poli e PowerCON Neutrik.</p>
	2	PC8433DSPW-2	+3x1,50 mm ²			
C290 Soft	1	PC9033DSPW-1	2x2x0,22 mm ²	2xNC3MXX-B NAC3MX-W-TOP	 	 <p>Cablato audio digitale DMX 110 ohm con cavo di alimentazione integrato, connettori professionali XLR 3 poli e PowerCON Neutrik.</p>
	2	PC9033DSPW-2	+3x2,50 mm ²			

Custom production on demand



AZIENDA CERTIFICATA UNI EN ISO 9001



RoHS2 2002/95/EC 2011/65/UE



tasker

...a project further...

Accessories 5

www.taskercables.com

POWER PREMADE CABLES

Code	Section	Length (m)	Description
114	3x0,75 mm ² H05VV-F	2	<p> Cablato di alimentazione 10A/250V con spina bipolare piatta stampata in PVC, contatto di terra e pin paralleli Ø 4,00 mm. Cavo H05VV-F 3x0,75 mm² di lunghezza 2,00 metri. Lato opposto tronco.</p> <p> 10A/250V power cord with PVC molded flat bipolar plug with ground contact and Ø 4,00 mm parallel pin. H05VV-F 3x0,75 mm² cable, length 2,00 meters. Free opposite side.</p>
116	2x0,50 mm ² H03VVH2-F	1,5	<p>Cablato di alimentazione 2,5A/250V con spina bipolare piatta stampata in PVC con pin paralleli Ø 4,00 mm. Cavo H03VVH2-F 2x0,50 mm² di lunghezza 1,50 metri. Sul lato opposto presa bipolare per applicazioni fredde o apparecchi di classe II.</p> <p>2,5A/250V power cord with PVC molded flat bipolar plug with parallel pin parallel Ø 4,00 mm. H03VVH2-F 2x0,50 mm² cable, length 1,50 meters. On the opposite side, bipolar socket for cold application or class II devices.</p>
181	3x0,75 mm ² H05VV-F	1,5 2,5	<p>Cablato di alimentazione 10A/250V con spina bipolare piatta stampata in PVC, contatto di terra e pin paralleli Ø 4,00 mm. Cavo H05VV-F 3x0,75 mm² di lunghezza 1,50 o 2,50 metri. Sul lato opposto presa bipolare dritta con contatto di terra per applicazioni fredde o apparecchi di classe I.</p> <p>10A/250V power cord with PVC molded flat bipolar plug with ground contact and Ø 4,00 mm parallel pin. H05VV-F 3x0,75 mm² cable, length of 1,50 or 2,50 meters. On the opposite side bipolar socket with ground contact for cold application or class I devices.</p>
211	3x0,75 mm ² H05VV-F	2	<p>Cablato di alimentazione 10A/250V con spina bipolare a 90° stampata in PVC con spinotti tondi Ø 4,80 mm e doppio contatto di terra. Cavo H05VV-F 3x0,75 mm² di lunghezza 2,00 metri. Sul lato opposto presa bipolare dritta con contatto di terra per applicazioni calde o apparecchi di classe I.</p> <p>10A/250V power cord with 90° pvc molded plug with round pin Ø 4,80 mm and double ground contacts. H05VV-F 3x0,75 mm² cable, length of 2,00 meters. On the opposite side bipolar socket with ground contact for hot application or class I devices.</p>
215	3x0,75 mm ² H05VV-F	2	<p>Cablato di alimentazione 10A/250V con spina bipolare piatta stampata in PVC, contatto di terra e pin paralleli Ø 4,00 mm. Cavo H05VV-F 3x0,75 mm² di lunghezza 2,00 metri. Sul lato opposto presa bipolare a 90° con contatto di terra per applicazioni fredde o apparecchi di classe I.</p> <p>10A/250V power cord with PVC molded flat bipolar plug with ground contact and Ø 4,00 mm parallel pin. H05VV-F 3x0,75 mm² cable, length 2,00 meters. On the opposite side bipolar socket with ground contact for cold application or class I devices.</p>
217	3x0,75 mm ² H05VV-F	2	<p>Cablato di alimentazione 10A/250V con spina bipolare a 90° stampata in PVC con spinotti tondi Ø 4,80 mm e doppio contatto di terra. Cavo H05VV-F 3x0,75 mm² di lunghezza 2,00 metri. Sul lato opposto presa bipolare a 90° con contatto di terra per applicazioni fredde o apparecchi di classe I.</p> <p>10A/250V power cord with 90° pvc molded plug with round pin Ø 4,80 mm and double ground contacts. H05VV-F 3x0,75 mm² cable, length of 2,00 meters. On the opposite side bipolar socket with ground contact for cold application or class I devices.</p>

tasker®



21st century



20th century



Studio Achilli
















Tasker® produced by Milan Srl, Cesano Boscone (Milano) Italy

IP Chart

IP ratings are represented by combining the first and second digits of the following columns. See example below.





1st Digit - SOLID Degree of protection against solid objects	2nd Digit - LIQUID Degree of protection against water
 <p>No Protection</p> <p>0</p>	 <p>No Protection</p> <p>0</p>
 <p>Protected against a solid object greater than 50mm, such as a hand.</p> <p>1</p>	 <p>Protected against water drops.</p> <p>1</p>
 <p>Protected against a solid object greater than 12,5mm, such as a finger.</p> <p>2</p>	 <p>Protected against water drops at a 15 degree angle.</p> <p>2</p>
 <p>Protected against a solid object greater than 2,5mm, such as a wire.</p> <p>3</p>	 <p>Protected against water spray at 60 degree angle.</p> <p>3</p>
 <p>Protected against a solid object greater than 1.0mm, such as a thin strap.</p> <p>4</p>	 <p>Protected against water splashing from any angle.</p> <p>4</p>
 <p>Dust Protected. Prevents ingress of dust sufficient to cause harm.</p> <p>5</p>	 <p>Protected against water jets from any angle.</p> <p>5</p>
 <p>Dust tight. No ingress of dust.</p> <p>6</p>	 <p>Protected against powerful water jets and heavy seas.</p> <p>6</p>
	 <p>Protected against the effects of temporary submersion in water. (3 feet = 1m)</p> <p>7</p>
	 <p>Protected against the effects of permanent submersion in water. (13 feet = 4m)</p> <p>8</p>









Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
BX-14	TN451		8÷10	10 pc.	 Codoli e passacavi larghi.  Large bushing chuck type.
					
NA2FP	TN009			10 pc.	Adattatore da XLR 3 poli femmina a Jack 6,3 mono maschio con corpo in metallo e contatti argentati. Fermale XLR 3 pin to male Jack 6,3 mono adapter with metal body and silver contacts.
					
NA2FPMF	TN010			10 pc.	Adattatore da XLR 3 poli femmina a RCA femmina con corpo in metallo e contatti argentati. Fermale XLR 3 pin to female RCA adapter with metal body and silver contacts.
					
NA2FPMM	TN011			10 pc.	Adattatore da XLR 3 poli femmina a RCA maschio con corpo in metallo e contatti argentati. Fermale XLR 3 pin to male RCA adapter with metal body and silver contacts.
					
NA2MBNC	TN012			10 pc.	Adattatore da XLR 3 poli maschio a BNC femmina con corpo in metallo e contatti argentati. Male XLR 3 pin to female BNC adapter with metal body and silver contacts.
					
NA2MP	TN013			10 pc.	Adattatore da XLR 3 poli maschio a Jack 6,3 mono maschio con corpo in metallo e contatti argentati. Male XLR 3 pin to male Jack 6,3 mono adapter with metal body and silver contacts.
					
NA2MPMF	TN014			10 pc.	Adattatore da XLR 3 poli maschio a RCA femmina con corpo in metallo e contatti argentati. Male XLR 3 pin to female RCA adapter with metal body and silver contacts.
					
NA2MPMM	TN015			10 pc.	Adattatore da XLR 3 poli maschio a RCA maschio con corpo in metallo e contatti argentati. Male XLR 3 pin to male RCA adapter with metal body and silver contacts.
					
NA3FF	TN016			10 pc.	Adattatore da XLR 3 poli femmina a XLR 3 poli femmina con corpo in metallo e contatti argentati. Fermale XLR 3 pin to female XLR 3 pin adapter with metal body and silver contacts.
					
NA3FJ	TN017			10 pc.	Adattatore da XLR 3 poli femmina a Jack 6,3 stereo femmina con bloccaggio, corpo in metallo e contatti argentati. Lockable female XLR 3 pin to female Jack 6,3 stereo adapter with metal body and silver contacts.
					
NA3FM	TN018			10 pc.	Adattatore da XLR 3 poli maschio a XLR 3 poli femmina con corpo in metallo e contatti argentati. Male XLR 3 pin to female XLR 3 pin adapter with metal body and silver contacts.
					
NA3FP	TN020			10 pc.	Adattatore da XLR 3 poli femmina a Jack 6,3 stereo maschio con corpo in metallo e contatti argentati. Fermale XLR 3 pin to male Jack 6,3 stereo adapter with metal body and silver contacts.
					
NA3MJ	TN021			10 pc.	Adattatore da XLR 3 poli maschio a Jack 6,3 stereo femmina con corpo in metallo e contatti argentati. Male XLR 3 pin to female Jack 6,3 stereo adapter with metal body and silver contacts.
					

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NA3MM	TN022			10 pc.	 Adattatore 3 poli XLR maschio a 3 poli XLR maschio con corpo in metallo e contatti argentati.  Male XLR 3 pin to male XLR 3 pin adapter with metal body and silver contacts.
					
NA3MP	TN023			10 pc.	Adattatore 3 poli XLR maschio a Jack 6,3 stereo maschio con corpo in metallo e contatti argentati. Male XLR 3 pin to male Jack 6,3 stereo adapter with metal body and silver contacts.
					
NAC3FC-HC	TN607	NAC3MP-HC	8÷20	10 pc.	Connettore PowerCON 32A 3 pin femmina bloccabile, corpo in plastica e contatti argentati. Lockable female PowerCON 32A 3 pin connector with plastic body and silver contacts.
					
NAC3FPX-ST-TOP	TN031	NAC3MX-W-TOP		10 pc.	Connettore PowerCON 16A 3 poli femmina da pannello con corpo in plastica, contatti argentati e terminali a vite. Female PowerCON 16A 3 pin panel connector with plastic body, silver contacts and screw terminals.
		 IP65			
NAC3FPX-TOP	TN030	NAC3MX-W-TOP		10 pc.	Connettore PowerCON 16A 3 poli femmina da pannello con corpo in plastica, contatti argentati e terminali piatti. Female PowerCON 16A 3 pin panel connector with plastic body, silver contacts and flat tab terminals.
		 IP65			
NAC3FX-W-TOP	TN034	NAC3MPX-TOP	6÷12	10 pc.	Connettore PowerCON 16A 3 poli femmina bloccabile per esterni con bottone di innesto o di scollegamento in tensione, corpo in plastica e contatti argentati. Lockable female PowerCON 16A 3 pin connector for outdoor with plastic body and silver contacts. Connection or disconnection button while under load.
		 IP65			
NAC3FXA-W-S	TN052	NAC3MPXXA	6÷12	10 pc.	Connettore PowerCON power IN 16A/250V 3 poli femmina bloccabile con corpo in plastica. Cablaggio da terminare con strumento di serraggio dedicato. Lockable female PowerCON power IN 16A/250V 3 pin connector with plastic body. Cabling to be terminated with dedicated tightening tool.
					
NAC3FXA-W-L	TN053	NAC3MPXXA	10÷16	10 pc.	Connettore PowerCON power IN 16A/250V 3 poli femmina bloccabile con corpo in plastica. Cablaggio da terminare con strumento di serraggio dedicato. Lockable female PowerCON power IN 16A/250V 3 pin connector with plastic body. Cabling to be terminated with dedicated tightening tool.
					
NAC3FXB-W-S	TN054	NAC3MPXXB	6÷12	10 pc.	Connettore PowerCON power OUT 16A/250V 3 poli femmina bloccabile con corpo in plastica. Cablaggio da terminare con strumento di serraggio dedicato. Lockable female PowerCON power OUT 16A/250V 3 pin connector with plastic body. Cabling to be terminated with dedicated tightening tool.
					
NAC3FXB-W-L	TN055	NAC3MPXXB	10÷16	10 pc.	Connettore PowerCON power OUT 16A/250V 3 poli femmina bloccabile con corpo in plastica. Cablaggio da terminare con strumento di serraggio dedicato. Lockable female PowerCON power OUT 16A/250V 3 pin connector with plastic body. Cabling to be terminated with dedicated tightening tool.
					

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NAC3MM-1	TN600	NAC3FXXA NAC3FXXB		10 pc.	 <p>Accoppiatore per il collegamento di cavi connettorizzati NAC3FXXA (power IN) e NAC3FXXB (power OUT), con corpo in plastica e contatti argentati.</p> <p></p> <p>Coupler for linking cables connectorized with NAC3FXXA (power IN) and NAC3FXXB (power OUT), with plastic body and silver contacts.</p>
NAC3MP-HC	TN608	NAC3FC-HC		10 pc.	 <p>Connettore PowerCON 32A 3 pin maschio da pannello con corpo in plastica e contatti argentati.</p> <p>Male PowerCON 32A 3 pin panel connector with plastic body and silver contacts.</p> <p></p>
NAC3MPX-TOP	TN036	NAC3FX-W-TOP		10 pc.	 <p>Connettore PowerCON 16A 3 poli maschio a pannello con corpo in plastica, contatti argentati e terminali piatti.</p> <p>Male PowerCON 16A 3 pin panel connector with plastic body, silver contacts and flat tab terminals.</p> <p> </p>
NAC3MPXXA	TN045	NAC3FXXA-W-S NAC3FXXA-W-L		10 pc.	 <p>Connettore PowerCON power IN 16A/250V 3 poli maschio da pannello con corpo in plastica.</p> <p>Male PowerCON power IN 16A/250V 3 pin panel connector with plastic body.</p> <p></p>
NAC3MPXXB	TN047	NAC3FXXB-W-S NAC3FXXB-W-L		10 pc.	 <p>Connettore PowerCON power OUT 16A/250V 3 poli maschio da pannello con corpo in plastica.</p> <p>Male PowerCON power OUT 16A/250V 3 pin panel connector with plastic body.</p> <p></p>
NAC3MX-W-TOP	TN035	NAC3FPX-TOP 6÷12 NAC3FX-W-TOP		10 pc.	 <p>Connettore PowerCON 16A 3 poli maschio bloccabile per esterni con bottone di innesto o di scollegamento in tensione, corpo in plastica e contatti argentati.</p> <p>Lockable male PowerCON 16A 3 pin connector for outdoor with plastic body and silver contacts. Connection or disconnection button while under load.</p> <p> </p>
NAC3PX-TOP	TN037	NAC3FPT-TOP NAC3MX-W-TOP		10 pc.	 <p>Connettore PowerCON 16A 3 poli doppio, maschio e femmina a pannello con corpo in plastica, contatti argentati e terminali piatti.</p> <p>Male and female PowerCON 16A 3 pin double connector with plastic body, silver contacts and flat tab terminals.</p> <p> </p>
NAHDMI-W	TN039	NKHDMI-*		10 pc.	 <p>Adattatore HDMI da femmina a maschio a pannello con corpo in metallo e contatti dorati.</p> <p>Female to male HDMI panel adapter metal body and gold contacts.</p> <p></p>
NAHDMI-W-B	TN040	NKHDMI-*		10 pc.	 <p>Adattatore HDMI da femmina a maschio a pannello con corpo in metallo nero e contatti dorati.</p> <p>Female to male HDMI panel adapter with metal black body and gold contacts.</p> <p></p>

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NAUSB3	TN410			10 pc.	 <p>Adattatore reversibile USB 3.0 da tipo A a tipo B da pannello con corpo in metallo e contatti dorati.</p> <p></p> <p>A to B USB 3.0 reversible panel adapter with metal body and gold contacts.</p>
NAUSB-W	TN043	NKUSB-*		10 pc.	 <p>Adattatore reversibile USB 2.0 da tipo A a tipo B da pannello con corpo in metallo e contatti dorati.</p> <p>A to B USB 2.0 reversible panel adapter with metal body and gold contacts.</p> <p></p>
NAUSB-W-B	TN044	NKUSB-*		10 pc.	 <p>Adattatore reversibile USB 2.0 da tipo A a tipo B da pannello con corpo in metallo nero e contatti dorati.</p> <p>A to B USB 2.0 reversible panel adapter with black metal body and gold contacts.</p> <p></p>
NBB75DFGB	TN454			10 pc.	 <p>Connettore BNC 75Ω femmina passante da pannello con corpo in metallo e contatti dorati.</p> <p>Female BNC 75Ω feedthrough panel connector with metal body and gold contacts.</p>
NBB75DSIB	TN460			10 pc.	 <p>Connettore BNC 75Ω femmina da pannello con corpo in metallo e contatti dorati.</p> <p>Female BNC 75Ω panel connector with metal body and gold contacts.</p>
NBB75DSGB	TN073			10 pc.	 <p>Connettore BNC 75Ω femmina da pannello con corpo in metallo, contatti dorati e contatto di terra.</p> <p>Female BNC 75Ω panel connector with metal body and gold contacts.</p>
NBB75FI	TN046			10 pc.	 <p>Connettore BNC 75Ω femmina passante da pannello con corpo in metallo e contatti dorati.</p> <p>75Ω BNC panel feedthrough panel connector with metal body and gold contacts.</p>
NBB75DFIX	TN072			10 pc.	 <p>Connettore BNC 75Ω femmina passante da pannello con corpo in metallo e contatti dorati per applicazione a 6 e 12G-SDI.</p> <p>Female BNC 75Ω panel connector with metal body and gold contacts for 6 and 12G-SDI applications.</p>
NBB75SI	TN800			1	 <p>Connettore BNC 75Ω femmina da pannello con corpo in metallo e contatti dorati.</p> <p>Female BNC 75Ω panel connector with metal body and gold contacts.</p>
NBLC75BVZ17	TN458	tasker TSK1080	10,4	10 pc.	 <p>Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per tasker TSK1080.</p> <p>Male BNC 75Ω panel connector with metal body and gold contacts for tasker TSK1080.</p>






















Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NBNC75BDD6	TN443		4,3	10 pc.	 Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati.  Male BNC 75Ω panel connector with metal body and gold contacts.
					
NBNC75BDD6X	TN461		4,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per applicazioni a 6 e 12G-SDI. Male BNC 75Ω panel connector with metal body and gold contacts for 6 and 12G-SDI applications.
					
NBNC75BF67	TN051	tasker TSK1077	4,7	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per tasker TSK1077. Female BNC 75Ω panel connector with metal body and gold contacts for tasker TSK1077.
					
NBNC75BLP7	TN442	tasker RG59	6,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati tasker RG59. Female BNC 75Ω panel connector with metal body and gold contacts for tasker RG59.
					
NBNC75BLP9	TN444	tasker TSK1078	6,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per tasker TSK1078. Female BNC 75Ω panel connector with metal body and gold contacts for tasker TSK1078.
					
NBNC75BLP9X	TN463	tasker TSK1078	6,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per applicazioni a 6 e 12G-SDI con tasker TSK1078. Male BNC 75Ω panel connector with metal body and gold contacts for 6 and 12G-SDI applications with tasker TSK1078.
					
NBNC75BTU11	TN445	tasker TSK1079	7,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per tasker TSK1079. Female BNC 75Ω panel connector with metal body and gold contacts for tasker TSK1079.
					
NBNC75BTU11X	TN462	tasker TSK1079	7,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per applicazioni a 6 e 12G-SDI con tasker TSK1079. Male BNC 75Ω panel connector with metal body and gold contacts for 6 and 12G-SDI applications with tasker TSK1079.
					
NBNC75BWU13	TN450	tasker T42	7,3	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per tasker T42. Female BNC 75Ω panel connector with metal body and gold contacts for tasker T42.
					
NBTC75BF14	TN441	tasker RGB75	2,9	10 pc.	Connettore BNC 75Ω maschio con corpo in metallo e contatti dorati per tasker RGB75. Female BNC 75Ω panel connector with metal body and gold contacts for tasker RGB75.
					
NC3FAAH1	TN122	NC3MXX		10 pc.	Connettore XLR 3 poli femmina da pannello con contatto di terra collegato al pin 1 e piedinatura orizzontale per circuiti stampati (PCB). Female XLR 3 pin panel connector with ground contact connected ad pin 1 and horizontal pins for printed circuit board (PCB).
					

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC3FD-H	TN066	NC3MXX		10 pc.	 Connettore XLR 3 poli femmina da pannello con corpo in metallo, contatti argentati e piedinatura orizzontale per circuiti stampati (PCB).  Female XLR 3 pin panel connector with metal body, silver contacts and horizontal pins for printed circuit board (PCB). 
					
NC3FD-L-1	TN064	NC3MXX		10 pc.	Connettore XLR 3 poli femmina da pannello con corpo in metallo e contatti argentati. Female XLR 3 pin panel connector with metal body and silver contacts. 
					
NC3FD-LX	TN068	NC3MXX-EMC		10 pc.	Connettore XLR 3 poli femmina schermato da pannello con corpo in metallo e contatti argentati. Female XLR 3 pin shielded panel connector with metal body and silver contacts. 
					
NC3FD-LX-B	TN069	NC3MXX-EMC-B		10 pc.	Connettore XLR 3 poli femmina schermato da pannello con corpo in metallo nero e contatti dorati. Female XLR 3 pin shielded panel connector with black metal body and gold contacts. 
					
NC3FD-LX-BAG	TN070	NC3MXX-EMC-B		10 pc.	Connettore XLR 3 poli femmina schermato da pannello con corpo in metallo nero e contatti argentati. Female XLR 3 pin shielded panel connector with black metal body and silver contacts. 
					
NC3FD-LX-HA	TN071	NC3MXX-EMC		10 pc.	Connettore XLR 3 poli femmina schermato da pannello, contatti a crimpare, corpo in metallo e contatti argentati. Crimping female XLR 3 pin shielded panel connector with metal body and silver contacts. 
					
NC3FD-H	TN066	NC3MXX		10 pc.	Connettore XLR 3 poli femmina da pannello con corpo in metallo, contatti argentati e piedinatura orizzontale per circuiti stampati (PCB). Female XLR 3 pin panel connector with metal body, silver contacts and horizontal pins for printed circuit board (PCB). 
					
NC3FD-V	TN065	NC3MXX		10 pc.	Connettore XLR 3 poli femmina da pannello con corpo in metallo, contatti argentati e piedinatura verticale per circuiti stampati (PCB). Female XLR 3 pin panel connector with metal body, silver contacts and vertical pins for printed circuit board (PCB). 
					
NC3FM-C	TN078		3.5÷8	10 pc.	Connettore XLR 3 poli maschio o femmina convertibile, con corpo in metallo e contatti dorati. Male or female XLR 3 pin convertible connector with metal body and gold contacts. 
					















Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC3FP-1	TN079	NC3MXX		10 pc.	 Connettore XLR 3 poli femmina da pannello con corpo in metallo, contatti argentati e flangia stretta.  Female XLR 3 pin panel connector with metal body, silver contacts and narrow flange
					
NC3FRX	TN082	NC3MD-L-1 NC3MXX NC3MRX	3.5÷8	10 pc.	Connettore XLR 3 poli femmina ad angolo retto. Corpo in metallo e contatti argentati. Female XLR 3 pin right angle connector with metal body and silver contacts.
					
NC3FX-HD	TN097	NC3MPR-HD NC3MX-HD	3.5÷8	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo e contatti dorati. Female XLR 3 pin connector with metal body and gold contacts.
					
NC3FXX	TN091	NC3MD-L-1 NC3MXX NC3MAAH	3.5÷8	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo e contatti argentati. Female XLR 3 pin connector with metal body and silver contacts.
					
NC3FXX-14-D	TN092	NC3MXX-14-D	8÷10	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo, contatti argentati e alloggiamento per cavi di diametro maggiorato. Female XLR 3 pin connector with metal body, silver contacts and large bushing.
					
NC3FXX-14-B-D	TN093	NC3MXX-14-B-D	8÷10	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo nero, contatti dorati e alloggiamento per cavi di diametro maggiorato. Female XLR 3 pin connector with black metal body, gold contacts and large bushing.
					
NC3FXX-B	TN095	NC3MD-L-B-1 NC3MXX-B	3.5÷8	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo nero e contatti dorati. Female XLR 3 pin connector with black metal body and gold contacts.
					
NC3FXX-BAG	TN096	NC3MD-L-BAG-1 NC3MXX-BAG	3.5÷8	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo nero e contatti argentati. Female XLR 3 pin connector with black metal body and silver contacts.
					
NC3FXX-EMC	TN102	NC3MD-LX NC3MXX-EMC	3.5÷8	10 pc.	Connettore XLR 3 poli femmina schermato con corpo in metallo e contatti argentati. Female XLR 3 pin shielded connector with metal body and silver contacts.
					
NC3FXX-HA	TN101	NC3MD-LX-HA NC3MXX-HA	3.5÷8	10 pc.	Connettore XLR 3 poli femmina schermato a crimpare, corpo in metallo e contatti argentati. Crimping female XLR 3 pin shielded connector with metal body and silver contacts.
					
NC3FXX-HD-D	TN098	NC3MPR-HD NC3MXX-HD-D	6÷8	10 pc.	Connettore XLR 3 poli femmina con corpo in metallo e contatti dorati. Female XLR 3 pin with metal body and gold contacts.
					



















Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC3MAAH	TN103	NC3FXX		10 pc.	 Connettore XLR 3 poli maschio da pannello con contatto di terra separato e piedinatura orizzontale per circuiti stampati (PCB).  Male XLR 3 pin panel connector with separate ground contact and horizontal pins for printed circuit board (PCB).
					
NC3MAV	TN141	NC3FXX		10 pc.	Connettore XLR 3 poli maschio da pannello con contatto di terra separato e piedinatura verticale per circuiti stampati (PCB). Male XLR 3 pin panel connector with separate ground contact and vertical pins for printed circuit board (PCB).
					
NC3MAV-0	TN143	NC3FXX		10 pc.	Connettore XLR 3 poli maschio da pannello con contatto di terra collegato e piedinatura verticale per circuiti stampati (PCB). Male XLR 3 pin panel connector with connected ground contact and vertical pins for printed circuit board (PCB).
					
NC3MD-H	TN107	NC3FXX		10 pc.	Connettore XLR 3 poli maschio da pannello con corpo in metallo, contatti argentati e piedinature orizzontali per circuiti stampati (PCB). Male XLR 3 pin panel connector with metal body, silver contacts and horizontal pins for printed circuit board (PCB).
					
NC3MD-L-1	TN106	NC3FXX		10 pc.	Connettore XLR 3 poli maschio da pannello con corpo in metallo e contatti argentati. Male XLR 3 pin panel connector with metal body and silver contacts.
					
NC3MD-LX	TN110	NC3FXX-EMC		10 pc.	Connettore XLR 3 poli maschio schermato da pannello con corpo in metallo e contatti argentati. Shielded male XLR 3 pin panel connector with metal body and silver contacts.
					
NC3MD-LX-B	TN111	NC3FXX-EMC-B		10 pc.	Connettore XLR 3 poli maschio schermato da pannello con corpo in metallo nero e contatti dorati. Shielded male XLR 3 pin panel connector with black metal body and gold contacts.
					
NC3MD-LX-BAG	TN113	NC3FXX-EMC-B		10 pc.	Connettore XLR 3 poli maschio schermato da pannello con corpo in metallo nero e contatti argentati. Shielded male XLR 3 pin panel connector with black metal body and silver contacts.
					
NC3MD-LX-HA	TN112	NC3FXX-EMC		10 pc.	Connettore XLR 3 poli maschio schermato da pannello con contatti a crimpare, corpo in metallo e contatti argentati. Shielded crimping male XLR 3 pin panel connector with metal body and silver contacts.
					



Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC3MD-V	TN114	NC3FXX		10 pc.	 <p>Connettore XLR 3 poli maschio da pannello con corpo in metallo, contatti argentati e piedinatura verticale per circuiti stampati (PCB).</p> <p></p> <p> Male XLR 3 pin panel connector with metal body, silver contacts and vertical pins for printed circuit board (PCB).</p>
NC3MP	TN119	NC3FXX		10 pc.	 <p>Connettore XLR 3 poli maschio da pannello con corpo in metallo, contatti argentati e flangia stretta.</p> <p>Male XLR 3 pin panel connector with metal body, silver contacts and narrow flange.</p>
NC3MP-B	TN120	NC3FXX		10 pc.	 <p>Connettore XLR 3 poli maschio da pannello con corpo in metallo nero, contatti dorati e flangia stretta.</p> <p>Male XLR 3 pin panel connector with black metal body, gold contacts and narrow flange.</p>
NC3MPR-HD	TN121	NC3FX-HD* NC3FXX-HD**	 IP65  IP67	10 pc.	 <p>Connettore XLR 3 poli maschio da pannello con corpo in metallo e contatti dorati.</p> <p>Male XLR 3 pin panel connector with metal body and gold contacts.</p>
NC3MRX	TN123	NC3FD-L-1 NC3FXX NC3FRX	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio ad angolo retto con corpo in metallo e contatti argentati.</p> <p>Male panel XLR 3 pin right angle connector with metal body and silver contacts.</p> <p></p>
NC3MX-HD	TN137	NC3FX-HD	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo e contatti dorati.</p> <p>Male panel XLR 3 pin connector with metal body and gold contacts.</p> <p>  IP65</p>
NC3MXX	TN129	NC3FD-L-1 NC3FXX NC3FAAH1	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo e contatti argentati.</p> <p>Male panel XLR 3 pin connector with metal body and silver contacts.</p> <p></p>
NC3MXX-14-D	TN130	NC3FXX-14-D	8÷10	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo e contatti argentati con alloggiamento per cavi di diametro maggiorato.</p> <p>Male XLR 3 pin connector with metal body, silver contacts and large bushing.</p> <p></p>
NC3MXX-14-B-D	TN094	NC3FXX-14-B-D	8÷10	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo nero, contatti dorati e alloggiamento per cavi di diametro maggiorato.</p> <p>Male XLR 3 pin connector with black metal body, gold contacts and large bushing.</p> <p></p>

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC3MXX-B	TN133	NC3FD-L-B-1 NC3FXX-B	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo nero e contatti dorati.</p> <p> Male XLR 3 pin connector with black metal body and gold contacts.</p>
NC3MXX-BAG	TN134	NC3FD-L-BAG-1 NC3FXX-BAG	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo nero e contatti argentati.</p> <p>Male XLR 3 pin connector with black metal body and silver contacts.</p>
NC3MXX-EMC	TN222	NC3FD-LX NC3FXX-EMC	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio schermato con corpo in metallo e contatti argentati.</p> <p>Shielded male XLR 3 pin connector with metal body and silver contacts.</p> <p></p>
NC3MXX-HA	TN139	NC3FD-LX-HA NC3FXX-HA	3.5÷8	10 pc.	 <p>Connettore XLR 3 poli maschio schermato con contatti a crimpare, corpo in metallo e contatti argentati.</p> <p>Crimping male XLR 3 pin connector with metal body and silver contacts.</p> <p></p>
NC3MXX-HD-D	TN223	NC3FXX-HD-D	6÷8	10 pc.	 <p>Connettore XLR 3 poli maschio con corpo in metallo e contatti dorati.</p> <p>Male XLR 3 pin connector with metal body and gold contacts.</p> <p>  IP67</p>
NC4FD-L-1	TN144	NC4MXX		10 pc.	 <p>Connettore XLR 4 poli femmina da pannello con corpo in metallo e contatti argentati.</p> <p>Female XLR 4 pin panel connector with metal body and silver contacts.</p> <p></p>
NC4FD-L-B-1	TN143	NC4MXX-B		10 pc.	 <p>Connettore XLR 4 poli femmina da pannello con corpo in metallo nero e contatti dorati.</p> <p>Female XLR 4 pin panel connector with black metal body and gold contacts.</p> <p></p>
NC4FD-LX	TN145			10 pc.	 <p>Connettore XLR 4 poli femmina schermato da pannello con corpo in metallo e contatti argentati.</p> <p>Shielded female XLR 4 pin panel connector with metal body and silver contacts.</p> <p></p>
NC4FP-1	TN149	NC4MXX		10 pc.	 <p>Connettore XLR 4 poli femmina da pannello con corpo in metallo, contatti argentati e flangia stretta.</p> <p>Shielded female XLR 4 pin panel connector with metal body, silver contacts and narrow flange.</p>
NC4FP-B-1	TN150	NC4MXX-B		10 pc.	 <p>Connettore XLR 4 poli femmina da pannello con corpo in metallo nero, contatti dorati e flangia stretta.</p> <p>Female XLR 4 pin panel connector with black metal body, gold contacts and narrow flange.</p>
NC4FRX	TN151	NC4MD-L-1 NC4MXX NC4MRX	3.5÷8	10 pc.	 <p>Connettore XLR 4 poli femmina ad angolo retto con corpo in metallo e contatti argentati.</p> <p>Female XLR 4 pin right angle connector with metal body and silver contacts.</p> <p></p>











Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC4FX-HD	TN159	NC4MPR-HD NC4MX-HD	3.5÷8	10 pc.	 Connettore XLR 4 poli femmina con corpo in metallo e contatti dorati.  Female XLR 4 pin connector with metal body and gold contacts.
					
NC4FXX	TN154	NC4MD-L-1 NC4MXX	3.5÷8	10 pc.	Connettore XLR 4 poli femmina con corpo in metallo e contatti argentati. Female XLR 4 pin connector with metal body and silver contacts.
					
NC4FXX-B	TN155	NC4MD-L-B-1 NC4MXX-B	3.5÷8	10 pc.	Connettore XLR 4 poli femmina con corpo in metallo nero e contatti dorati. Female XLR 4 pin connector with metal body and gold contacts.
					
NC4MD-L-1	TN156	NC4FXX		10 pc.	Connettore XLR 4 poli maschio da pannello con corpo in metallo e contatti argentati. Shielded male XLR 4 pin panel connector with metal body and silver contacts.
					
NC4MD-LX	TN157			10 pc.	Connettore XLR 4 poli maschio schermato da pannello con corpo in metallo e contatti dorati. Female XLR 4 pin panel connector with metal body and gold contacts.
					
NC4MP	TN158	NC4FXX		10 pc.	Connettore XLR 4 poli maschio da pannello con corpo in metallo, contatti argentati e flangia stretta. Male XLR 4 pin panel connector with metal body, silver contacts and narrow flange.
					
NC4MPR-HD	TN167	NC4FX-HD NC4FXX-HD**		10 pc.	Connettore XLR 4 poli maschio da pannello con corpo in metallo e contatti dorati. Male XLR 4 pin panel connector with metal body and gold contacts.
		 			
NC4MRX	TN165	NC4FD-L-1 NC4FXX NC4FRX	3.5÷8	10 pc.	Connettore XLR 4 poli maschio ad angolo retto con corpo in metallo e contatti argentati. Male XLR 4 pin right angle connector with metal body and silver contacts.
					
NC4MX-HD	TN160	NC4FX-HD	3.5÷8	10 pc.	Connettore XLR 4 poli maschio con corpo in metallo e contatti dorati. Male XLR 4 pin connector with metal body and gold contacts.
					
NC4MXX	TN168	NC4FD-L-1 NC4FXX	3.5÷8	10 pc.	Connettore XLR 4 poli maschio con corpo in metallo e contatti argentati. Male XLR 4 pin connector with metal body and silver contacts.
					
NC4MXX-B	TN169	NC4FD-L-B-1 NC4FXX-B	3.5÷8	10 pc.	Connettore XLR 4 poli maschio con corpo in metallo nero e contatti dorati. Male XLR 4 pin connector with black metal body and gold contacts.
					







Neutrik













Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC5FD-L-1	TN170	NC5MXX		10 pc.	 Connettore XLR 5 poli femmina da pannello con corpo in metallo e contatti argentati.  Female panel XLR 5 pin connector with metal body and silver contacts.
					
NC5FD-LX	TN171			10 pc.	Connettori XLR 5 poli femmina schermato da pannello con corpo in metallo, contatti argentati. Shielded female XLR 5 pin connector panel with metal body, silver contacts.
					
NC5FP-1	TN175	NC5MXX		10 pc.	Connettore XLR 5 poli femmina da pannello con corpo in metallo, contatti argentati e flangia stretta. Shielded female XLR 5 pin panel connector with metal body, silver contacts and narrow flange.
					
NC5FRX	TN182	NC5MD-L-1 NC5MXX NC5MRX	3.5÷8	10 pc.	Connettore XLR 5 poli femmina ad angolo retto con corpo in metallo e contatti argentati. Female XLR 5 pin right angle connector with metal body and silver contacts.
					
NC5FX-HD	TN179	NC5MPR-HD NC5MX-HD	3.5÷8	10 pc.	Connettore XLR 5 poli femmina con corpo in metallo e contatti dorati. Female XLR 5 pin connector with metal body and gold contacts.
					
NC5FXX	TN180	NC5MD-L-1 NC5MXX	3.5÷8	10 pc.	Connettore XLR 5 poli femmina con corpo in metallo e contatti argentati. Female XLR 5 pin connector with metal body silver contacts.
					
NC5FXX-B	TN181	NC5MD-L-B-1 NC5MXX-B	3.5÷8	10 pc.	Connettore XLR 5 poli femmina con corpo in metallo nero e contatti dorati. Female XLR 5 pin connector with black metal body gold contacts.
					
NC5FXX-HD-D	TN183	NC5MPR-HD NC5MXX-HD-D	6÷8	10 pc.	Connettore XLR 5 poli femmina con corpo in metallo e contatti dorati. Female XLR 5 pin connector with metal body gold contacts.
					
NC5MD-L-1	TN184	NC5FXX		10 pc.	Connettore XLR 5 poli maschio da pannello con corpo in metallo e contatti argentati. Male XLR 5 pin panel connector with metal body and silver contacts.
					
NC5MD-L-B-1	TN186	NC5FXX-B	3.5÷8	10 pc.	Connettore XLR 5 poli maschio da pannello con corpo in metallo nero e contatti dorati. Male XLR 5 pin panel connector with black metal body and gold contacts.
					











Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC5MD-LX	TN185			10 pc.	 <p>Connettore XLR 5 poli maschio schermato da pannello con corpo in metallo e contatti argentati.</p> <p>Shielded male panel XLR 5 pin panel connector with metal body and silver contacts.</p>
NC5MD-LX-B	TN188			10 pc.	 <p>Connettori XLR 5 poli maschio schermato da pannello con corpo in metallo nero, contatti dorati.</p> <p>Shielded male panel XLR 5 pin connector with black metal body and gold contacts.</p>
NC5MP	TN187	NC5FXX		10 pc.	 <p>Connettore XLR 5 poli maschio da pannello con corpo in metallo, contatti argentati e flangia stretta.</p> <p>Male XLR 5 pin panel connector with metal body, silver contacts and narrow flange.</p>
NC5MPR-HD	TN197	NC5FX-HD* NC5FXX-HD**		10 pc.	 <p>Connettore XLR 5 poli maschio da pannello con corpo in metallo e contatti dorati.</p> <p>Male XLR 5 pin panel connector with metal body and gold contacts.</p>
NC5MRX	TN192	NC5FD-L-1 NC5FXX NC5FRX	3.5÷8	10 pc.	 <p>Connettore XLR 5 poli maschio ad angolo retto con corpo in metallo e contatti argentati.</p> <p>Male XLR 5 pin right angle connector with metal body and silver contacts.</p>
NC5MX-HD	TN194	NC5FX-HD	3.5÷8	10 pc.	 <p>Connettore XLR 5 poli maschio con corpo in metallo e contatti dorati.</p> <p>Male XLR 5 pin connector with metal body and gold contacts.</p>
NC5MXX	TN195	NC5FD-L-1 NC5FXX	3.5÷8	10 pc.	 <p>Connettore XLR 5 poli maschio con corpo in metallo e contatti argentati.</p> <p>Male XLR 5 pin connector with metal body silver contacts.</p>
NC5MXX-B	TN196	NC5FD-L-B-1 NC5FXX-B	3.5÷8	10 pc.	 <p>Connettore XLR 5 poli maschio con corpo in metallo nero e contatti dorati.</p> <p>Male XLR 5 pin connector with black metal body gold contacts.</p>
NC5MXX-HD-D	TN199	NC5FXX-HD-D	6÷8	10 pc.	 <p>Connettore XLR 5 poli maschio corpo in metallo e contatti dorati.</p> <p>Male XLR 5 pin connector with metal body and gold contacts.</p>
NC6FD-L-1	TN198	NC6MXX		10 pc.	 <p>Connettore XLR 6 poli femmina da pannello con corpo in metallo e contatti argentati.</p> <p>Female XLR 6 pin panel connector with metal body and silver contacts.</p>

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NC6FP-1	TN204	NC6MXX		10 pc.	 <p>Connettore XLR 6 poli femmina da pannello con corpo in metallo, contatti argentati e flangia stretta.</p> <p>Female XLR 6 pin panel connector with metal body, silver contacts and narrow flange.</p>
NC6FXX	TN203	NC6MD-L-1 NC6MXX	3.5÷8	10 pc.	 <p>Connettore XLR 6 poli femmina con corpo in metallo e contatti argentati.</p> <p>Female XLR 5 pin connector with metal body and silver contacts.</p>
NC6MD-L-1	TN205	NC6FXX		10 pc.	 <p>Connettore XLR 6 poli maschio da pannello con corpo in metallo e contatti argentati.</p> <p>Male XLR 6 pin panel connector with metal body gold contacts.</p>
NC6MP	TN207	NC6FXX		10 pc.	 <p>Connettore XLR 6 poli maschio da pannello con corpo in metallo, contatti argentati e flangia stretta.</p> <p>Male XLR 6 pin panel connector with metal body, silver contacts and narrow flange.</p>
NC6MXX	TN211	NC6FD-L-1 NC6FXX	3.5÷8	10 pc.	 <p>Connettore XLR 6 poli maschio con corpo in metallo e contatti argentati.</p> <p>Male XLR 6 pin connector with metal body and silver contacts.</p>
NC7FD-L-1	TN226	NC7MXX		10 pc.	 <p>Connettore XLR 7 poli femmina da pannello con corpo in metallo e contatti argentati.</p> <p>Female XLR 7 pin panel connector with metal body and silver contacts.</p>
NC7FP-1	TN214	NC7MXX		10 pc.	 <p>Connettore XLR 7 poli da pannello con corpo in metallo, contatti argentati e flangia stretta.</p> <p>Female XLR 7 pin panel connector with metal body, silver contacts and narrow flange.</p>
NC7FXX	TN218	NC7MD-L-1 NC7MXX	3.5÷8	10 pc.	 <p>Connettore XLR 7 poli femmina con corpo in metallo e contatti argentati.</p> <p>Female XLR 7 pin connector with metal body and silver contacts.</p>
NC7MD-L-1	TN225	NC7FXX		10 pc.	 <p>Connettore XLR 7 poli maschio con corpo in metallo e contatti argentati.</p> <p>Male XLR 7 pin connector with metal body and silver contacts.</p>
NC7MXX	TN224	NC7FD-L-1 NC7FXX	3.5÷8	10 pc.	 <p>Connettore XLR 7 poli maschio con corpo in metallo e contatti argentati.</p> <p>Male XLR 7 pin connector with metal body and silver contacts.</p>
NCJ6FI-S	TN246			10 pc.	 <p>Adattatore da XLR 3 poli femmina a jack 6.3 stereo da pannello con corpo in plastica e contatti dorati.</p> <p>Female panel adapter from XLR 3 pin to jack 6.3 stereo.</p>

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NCJ9FI-H	TN455			10 pc.	 <p>Connettore da pannello XLR 3 poli femmina con innesto alternativo per jack 6,3 stereo, corpo in plastica, contatti dorati e piedinatura orizzontale per circuiti stampati (PCB).</p> <p> Female XLR 3 pin receptacle with Jack 6,3 stereo panel connector with horizontal pins for printed circuit board (PCB).</p>
NE8FDP	TN265	NE8MX-1		10 pc.	 <p>Connettore EtherCON cat.5e femmina da pannello con corpo in metallo e contatti dorati.</p> <p>Female EtherCON cat.5e feedthrough panel connector with metal body and gold contacts.</p>
NE8FDP-B	TN266	NE8MX-B-TOP-14		10 pc.	 <p>Connettore EtherCON cat.5e femmina da pannello con corpo in metallo nero e contatti dorati.</p> <p>Female EtherCON cat.5e feedthrough panel connector with black metal body and gold contacts.</p>
NE8FDP-TOP	TN267	NE8MX-B-TOP-14		10 pc.	 <p>Connettore EtherCON cat.5e femmina passante da pannello con corpo in metallo e contatti dorati.</p> <p>Female EtherCON cat.5e feedthrough panel connector with metal body and gold contacts.</p> <p> </p>
NE8FDV-YK-B	TN260	NE8MX-B		10 pc.	 <p>Connettore EtherCON cat.5e femmina da pannello con corpo in metallo, contatti dorati e terminali a perforazione d'isolante (IDC).</p> <p>Female EtherCON cat.5e panel connector with black metal body, gold contacts and insulation displacement termination (IDC).</p>
NE8FDX-P6	TN255	NE8MX6 NE8MX6-T		10 pc.	 <p>Connettore EtherCON cat.6A femmina schermato passante da pannello con corpo in metallo e contatti dorati.</p> <p>Shielded female EtherCON cat.6A feedthrough panel connector with metal body and gold contacts.</p>
NE8FDX-P6-B	TN256	NE8MX6-B NE8MX6-B-T		10 pc.	 <p>Connettore EtherCON cat.6A femmina schermato passante da pannello con corpo in metallo nero e contatti dorati.</p> <p>Shielded female EtherCON cat.6A feedthrough panel connector with metal body and gold contacts.</p>
NE8FDX-P6-W	TN257	NE8MX-B-TOP-14 NE8MX6 NE8MX6-T		10 pc.	 <p>Connettore EtherCON cat.6A femmina schermato passante da pannello con corpo in metallo nero e contatti dorati.</p> <p>Shielded female EtherCON cat.6A feedthrough panel connector with metal body and gold contacts.</p> <p></p>

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NE8FDY-C6	TN270	NE8MC6-MO		10 pc.	 <p>Connettore EtherCON cat.6A femmina schermato da pannello con corpo in metallo, contatti dorati e terminali a perforazione d'isolante (IDC).</p> <p> Shielded female EtherCON cat.6A panel connector with metal body, gold contacts and insulation displacement termination (IDC).</p> <p></p>
NE8FDY-C6-B	TN271	NE8MC6-MO		10 pc.	 <p>Connettore EtherCON cat.6A femmina schermato da pannello con corpo in metallo nero, contatti dorati e terminali a perforazione d'isolante (IDC).</p> <p>Shielded female EtherCON cat.6A panel connector with black metal body, gold contacts and insulation displacement termination (IDC).</p> <p></p>
NE8FF	TN272			10 pc.	 <p>Accoppiatore etherCON femmina passante per prolunghe RJ45 con corpo in metallo e contatti dorati.</p> <p>EtherCON RJ45 feedthrough for cable extensions with metal body and gold contacts.</p>
NE8MC6-MO	TN500	NE8FDY-C6 NE8FDY-C6-B	5.5-6.5	10 pc.	 <p>Connettore EtherCON cat.6 maschio schermato con corpo in metallo e contatti dorati.</p> <p>Shielded male EtherCON cat.6 connector with metal body and gold contacts.</p> <p></p>
NE8MX-1	TN274	NE8FDP	3.5-8	10 pc.	 <p>Porta connettore EtherCON maschio con corpo in metallo per alloggiamenti RJ45.</p> <p>Male EtherCON carrier for RJ45 with metal body.</p>
NE8MX6	TN286	NE8FDX-P6 NE8FDX-P6-W	7-9.5	10 pc.	 <p>Connettore EtherCON cat.6A maschio con corpo in metallo e contatti dorati per anime di diametro maggiore di 1,1 mm.</p> <p>Male EtherCON cat.6A connector with metal body and gold contacts for core diameter more than 1,1 mm.</p> <p></p>
NE8MX6-B	TN278	NE8FDX-P6-B	7-9.5	10 pc.	 <p>Connettore EtherCON cat.6A maschio con corpo in metallo nero e contatti dorati per anime di diametro maggiore di 1,1 mm.</p> <p>Male EtherCON cat.6A connector with black metal and gold contacts for core diameter more than 1,1 mm.</p> <p></p>
NE8MX6-B-T	TN502	NE8FDX-P6-B	7-9.5	10 pc.	 <p>Connettore EtherCON cat.6A maschio con corpo in metallo nero e contatti dorati per anime di diametro inferiore di 1,1 mm.</p> <p>Male EtherCON cat.6A connector with black metal and gold contacts for core diameter more than 1,1 mm.</p> <p></p>
NE8MX6-T	TN501	NE8FDX-P6 NE8FDX-P6-W	7-9.5	10 pc.	 <p>Connettore EtherCON cat.6A maschio con corpo in metallo e contatti dorati per anime di diametro inferiore di 1,1 mm.</p> <p>Male EtherCON cat.6A connector with metal and gold contacts for core diameter more than 1,1 mm.</p> <p></p>

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NE8MX-B	TN276	NE8FDP-B NE8FDV-YK-B NE8FDX-P6-B	4.5÷8	10 pc.	 <p>Porta connettore EtherCON maschio con corpo in metallo nero per alloggiamenti RJ45.</p> <p> Male EtherCON carrier for RJ45 with black metal body.</p>
NE8MX-B-TOP	TN618	NE8FDP-TOP	5÷8	10 pc.	 <p>Porta connettore EtherCON maschio con corpo in metallo nero per alloggiamento RJ45.</p> <p>Male EtherCON carrier for RJ45 with black metal body.</p> <p></p>
NE8MX-B-TOP-14	TN612	NE8FDP-TOP	8÷10	10 pc.	 <p>Porta connettore EtherCON maschio con corpo in metallo nero per alloggiamento RJ45.</p> <p>Male EtherCON carrier for RJ45 with black metal body.</p> <p></p>
NF2C-B/2	TN277	NF2D-B-0	3÷7.3	10 pc.	 <p>Coppia di connettori RCA, uno rosso e uno nero con corpo in plastica e contatti dorati.</p> <p>Phone RCA couple of connector, one red and one black with plastic flange and gold contacts.</p>
NF2D-B-0	TN268	NF2C-B/2		10 pc.	 <p>Connettore RCA femmina da pannello con flangia in metallo nero.</p> <p>Female RCA panel connector with black metal flange.</p>
NJ3FC6	TN280		3.5÷8	10 pc.	 <p>Connettore Jack femmina 6,3 bloccabile con corpo in metallo e contatti argentati. Adatto a connessioni sia mono che stereo.</p> <p>Lockable female Jack 6,3 connector with metal body and silver contacts. Suitable for mono and stereo connections.</p>
NJ3FC6-BAG	TN281		3.5÷8	10 pc.	 <p>Connettore Jack femmina 6,3 bloccabile con corpo in metallo nero e contatti argentati. Adatto a connessioni sia mono che stereo.</p> <p>Lockable female Jack 6,3 connector with black metal body and silver contacts. Suitable for mono and stereo connections.</p>
NJ3FP6C	TN282			10 pc.	 <p>Connettore Jack femmina 6,3 bloccabile da pannello con corpo in metallo e contatti argentati. Adatto a connessioni sia mono che stereo.</p> <p>Lockable female Jack 6,3 panel connector with metal body and silver contacts. Suitable for mono and stereo connections.</p>
NJ3FP6C-BAG	TN284			10 pc.	 <p>Connettore Jack femmina 6,3 bloccabile da pannello con corpo in metallo nero e contatti argentati. Adatto a connessioni sia mono che stereo.</p> <p>Lockable female Jack 6,3 panel connector with black metal body and silver contacts. Suitable for mono and stereo connections.</p>
NL2FX	TN290	NE2MPXX	6÷10	10 pc.	 <p>Connettore SpeakON 40A 2 poli femmina con corpo in plastica e contatti argentati per conduttori da 1,5 a 4,0 mm².</p> <p>Female SpeakON 40A 2 pole connector with plastic body and silver contacts for wiresize from 1,5 to 4,0 mm².</p> <p></p>

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NL2FXX-W-S	TN291	NL2MPXX	6÷12	10 pc.	 <p>Connettore SpeakON 37A 2 poli femmina con corpo in plastica e contatti argentati per conduttori da 1,5 a 4,0 mm².</p> <p>Female SpeakON 37A 2 pole connector with plastic body and silver contacts for wiresize from 1,5 to 4,0 mm².</p> <p></p>
NL2MPXX	TN295	NL2FX NL2FXX-W-S		10 pc.	 <p>Connettori SpeakON 24A 2 poli maschio da pannello, con corpo in plastica e contatti argentati.</p> <p>Male SpeakON 24A 2 pole panel connector with plastic body and silver contacts.</p> <p></p>
NL4FC	TN294	NL4MPXX NL4MPRXX	6÷15	10 pc.	 <p>Connettore SpeakON 30A 4 poli femmina con corpo in plastica e contatti argentati per conduttori da 4,0 mm².</p> <p>Female SpeakON 30A 4 pole connector with plastic body and silver contacts for wiresize of 4,0 mm².</p> <p></p>
NL4FX	TN296	NL4MPXX NL4MPRXX	7÷14.5	10 pc.	 <p>Connettore SpeakON 40A 4 poli femmina con corpo in plastica e contatti argentati per conduttori da 4,0 a 6,0 mm².</p> <p>Female SpeakON 40A 4 pole connector with plastic body and silver contacts for wiresize from 4,0 to 6,0 mm².</p> <p></p>
NL4FXX-W-S	TN613	NL4MPXX	6÷12	10 pc.	 <p>Connettore SpeakON 37A 4 poli femmina con corpo in plastica e contatti argentati per conduttori da 1,5 a 4,0 mm².</p> <p>Female SpeakON 37A 4 pole connector with plastic body and silver contacts for wiresize from 1,5 to 4,0 mm².</p> <p></p>
NL4FXX-W-L	TN614	NL4MPXX	10÷16	10 pc.	 <p>Connettore SpeakON 37A 4 poli femmina con corpo in plastica e contatti argentati per conduttori da 1,5 a 4,0 mm².</p> <p>Female SpeakON 37A 4 pole connector with plastic body and silver contacts for wiresize from 1,5 to 4,0 mm².</p> <p></p>
NL4MMX	TN301	NL2FX NL4FC NL4FX		10 pc.	 <p>Adattatore SpeakON 15A maschio-maschio bloccabile con corpo in plastica e contatti argentati per connessioni con femmine da 2 e 4 poli.</p> <p>Lockable male SpeakON adapter 15A with plastic body and silver contacts for connection with 2 and 4 pole female.</p>
NL4MPXX	TN303	NL4FC NL4FX NL4FXX-W-S NL4FXX-W-L		10 pc.	 <p>Connettore SpeakON 25A 4 poli maschio con corpo in plastica e contatti argentati.</p> <p>Male SpeakON 25A 4 pole panel connector with plastic body and silver contacts.</p> <p></p>
NL4MPRXX	TN304	NL4FC NL4FX		10 pc.	 <p>Connettore SpeakON 25A 4 poli maschio da pannello con flangia di tipo G, corpo in plastica e contatti argentati.</p> <p>Male SpeakON 25A 4 pole panel connector with G flange, plastic body and silver contacts.</p> <p></p>
NL8FC	TN305	NL8MPR NL8MPRXX	8÷20	10 pc.	 <p>Connettore SpeakON 30A 8 poli femmina da corpo in plastica e contatti argentati per conduttori da 4,0 mm².</p> <p>Female SpeakON 30A 8 pole connector with plastic body and silver contacts for wiresize of 4,0 mm².</p> <p></p>

Neutrik



Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NL8MPR TN306	NL8FC	10 pc.			Connettore SpeakON 30A 8 poli maschio da pannello con flangia tipo G, corpo in plastica e contatti argentati. Male SpeakON 30A 8 pole panel connector with G flange, plastic body and silver contacts.
NL8MPRXX TN615	NL8FC	10 pc.			Connettore SpeakON 30A 8 poli maschio da pannello con flangia di tipo G, corpo in plastica e contatti argentati. Male SpeakON 30A 8 pole panel connector with G flange, plastic body and silver contacts.
NLT4FFX TN313	NLT4MPXX	9÷16	10 pc.		Connettore SpeakON 30A 4 poli femmina con corpo in metallo e contatti argentati. Female SpeakON 30A 4 pole connector with metal body and silver contacts.
			IP54		
NLT4MPXX TN308	NLT4FFX	10 pc.			Connettore SpeakON 30A 4 poli maschio da pannello con flangia tipo G, corpo in metallo e contatti argentati. Male SpeakON 30A 4 pole panel connector with G flange, metal body and silver contacts.
NLT8FX TN318	NLT8MPXX	8÷20	10 pc.		Connettore SpeakON 40A 8 poli femmina con corpo in metallo e contatti argentati. Female SpeakON 40A 8 pole panel connector with metal body and silver contacts.
		IP50			
NLT8MPXX TN309	NLT8FX	10 pc.			Connettore SpeakON 30A 8 poli maschio da pannello con flangia tipo G, corpo in metallo e contatti argentati. Male SpeakON 30A 8 pole panel connector with G flange, metal body and silver contacts.
NP2RX TN322	4÷7	10 pc.			Connettore Jack mono maschio 6,3 ad angolo retto con corpo in metallo e contatti in nickel. Male Jack 6,3 mono right angle connector with metal body and nickel contacts.
NP2RX-AU-SILENT TN324	4÷7	10 pc.			Connettore Jack mono maschio 6,3 ad angolo retto con corpo in metallo, contatti dorati e silent switch. Male Jack 6,3 mono right angle connector with metal body, gold contacts and silent switch.
NP2RX-B TN325	4÷7	10 pc.			Connettore Jack mono maschio 6,3 ad angolo retto con corpo in metallo nero e contatti dorati. Male Jack 6,3 mono right angle connector with black metal body and gold contacts.

Neutrik

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NP2RX-BAG TN326	4÷7	10 pc.			Connettore Jack mono maschio 6,3 ad angolo retto con corpo in metallo nero e contatti in nickel. Male Jack 6,3 mono right angle connector with black metal body and nickel contacts.
NP2X TN329	4÷7	10 pc.			Connettore Jack mono maschio 6,3 con corpo sottile in metallo e contatti in nickel. Male Jack 6,3 mono connector with thin black metal body and nickel contacts.
NP2X-AU-SILENT TN330	4÷7	10 pc.			Connettore Jack mono maschio 6,3 con corpo in metallo, contatti dorati e silent switch. Male Jack 6,3 mono connector with metal body, gold contacts and silent switch.
NP2XX-SILENT TN617	4÷7	10 pc.			Connettore jack mono maschio 6,3 con corpo in metallo, contatti dorati e silent switch. Male jack 6,3 mono connector with metal body, gold contacts and silent switch.
NP2X-B TN331	4÷7	10 pc.			Connettore Jack mono maschio 6,3 con corpo sottile in metallo e contatti dorati. Male Jack 6,3 mono connector with metal body and gold contacts.
NP2X-BAG TN332	4÷7	10 pc.			Connettore Jack mono maschio 6,3 con corpo sottile in metallo nero e contatti in nickel. Male Jack 6,3 mono connector with thin black metal body and nickel contacts.
NP3RX TN339	4÷7	10 pc.			Connettore Jack mono maschio 6,3 ad angolo retto con corpo in metallo e contatti in nickel. Male Jack 6,3 mono right angle connector with metal body and nickel contacts.
NP3RX-BAG TN341	4÷7	10 pc.			Connettore Jack mono maschio 6,3 ad angolo retto con corpo in metallo nero e contatti in nickel. Male Jack 6,3 mono right angle connector with black metal body and nickel contacts.
NP3X TN353	4÷7	10 pc.			Connettore Jack stereo maschio 6,3 con corpo sottile in metallo e contatti in nickel. Male Jack 6,3 mono connector with thin metal body and nickel contacts.
NP3X-B TN354	4÷7	10 pc.			Connettore Jack stereo maschio 6,3 con corpo sottile in metallo nero e contatti dorati. Male Jack 6,3 mono connector with thin black metal body and gold contacts.
NP3X-BAG TN355	4÷7	10 pc.			Connettore Jack stereo maschio 6,3 con corpo sottile in metallo nero e contatti in nickel. Male Jack 6,3 mono connector with thin black metal body and nickel contacts.

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NTE1	TN359			10 pc.	 <p>Trasformatore audio professionale 1:1 con conduttori liberi.</p>  <p>Professional audio transformer 1:1 with free wires.</p>
					
NTE10/3	TN360			10 pc.	<p>Trasformatore audio professionale 1:3:10 con conduttori liberi.</p> <p>Professional audio transformer 1:3:10 with free wires.</p>
					
NTP3RC	TN365	2÷4.5		10 pc.	<p>Connettore Jack stereo maschio 3,5 ad angolo retto con corpo in metallo e contatti in nickel.</p> <p>Male Jack 3,5 stereo right angle connector with metal body and nickel contacts.</p>
					
NTP3RC-B	TN366	2÷4.5		10 pc.	<p>Connettore Jack stereo maschio 3,5 ad angolo retto con corpo in metallo nero e contatti dorati.</p> <p>Male Jack 3,5 stereo right angle connector with black metal body and gold contacts.</p>
					
NYS201	TN367	6		10 pc.	<p>Connettore Jack mono maschio 6,3 con corpo in metallo e contatti in nickel.</p> <p>Male Jack 6,3 mono connector with metal body and nickel contacts.</p>
					
NYS202	TN368	6		10 pc.	<p>Connettore Jack stereo maschio 6,3 con corpo in metallo e contatti in nickel.</p> <p>Male Jack 6,3 stereo connector with metal body and nickel contacts.</p>
					
NYS203	TN369	6		10 pc.	<p>Connettore Jack mono maschio 6,3 con corpo in metallo e contatti in nickel.</p> <p>Male Jack 6,3 mono connector with metal body and nickel contacts.</p>
					
NYS204	TN370	6		10 pc.	<p>Connettore Jack stereo maschio 6,3 con corpo in metallo e contatti in nickel.</p> <p>Male Jack 6,3 stereo connector with metal body and nickel contacts.</p>
					
NYS215	TN452			10 pc.	<p>Connettore Jack stereo femmina 6,3 con corpo in metallo e piedinatura per circuiti stampati (PCB).</p> <p>Female Jack 6,3 stereo connector with metal body and pins for printed circuit board (PCB).</p>
					
NYS216	TN453			10 pc.	<p>Connettore Jack stereo femmina 6,3 con corpo in plastica e piedinatura per circuiti stampati (PCB).</p> <p>Female Jack 6,3 stereo connector with plastic body and pins for printed circuit board (PCB).</p>
					
NYS2202P	TN374	6		10 pc.	<p>Connettore Jack mono femmina 6,3 con corpo in metallo e contatti in nickel.</p> <p>Female Jack 6,3 mono connector with metal body and nickel contacts.</p>
					

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NYS2203P	TN376		6	10 pc.	 <p>Connettore Jack stereo femmina 6,3 con corpo in metallo e contatti in nickel.</p>  <p>Female Jack 6,3 stereo connector with metal body and nickel contacts.</p>
					
NYS221	TN377			10 pc.	<p>Connettore Jack stereo femmina 6,3 da pannello con corpo in metallo senza flangia.</p> <p>Female Jack 6,3 stereo panel connector with metal body without flange.</p>
					
NYS225	TN386	8		10 pc.	<p>Connettore Jack mono maschio 6,3 con corpo corto in metallo e contatti in nickel.</p> <p>Female Jack 6,3 mono connector with short metal body and nickel contacts.</p>
					
NYS228	TN396	8		10 pc.	<p>Connettore Jack stereo maschio 6,3 con corpo lungo in metallo e contatti in nickel.</p> <p>Female Jack 6,3 mono connector with long metal body and nickel contacts.</p>
					
NYS230	TN402			10 pc.	<p>Connettore Jack stereo femmina 6,3 da pannello con corpo in metallo e linguette faston da 0,205".</p> <p>Female Jack 6,3 stereo panel connector with metal body and 0,205" faston tabs.</p>
					
NYS231B	TN404	6.5		10 pc.	<p>Connettore Jack stereo maschio 3,5 con corpo in metallo nero e contatti in nickel.</p> <p>Male Jack 3,5 stereo connector with black metal body and nickel contacts.</p>
					
NYS231BG	TN405	6.5		10 pc.	<p>Connettore Jack stereo maschio 3,5 con corpo in metallo nero e contatti dorati.</p> <p>Male Jack 3,5 stereo connector with black metal body and gold contacts.</p>
					
NYS240	TN415	4		10 pc.	<p>Connettore Jack stereo femmina 3,5 con corpo in metallo e contatti in nickel.</p> <p>Female Jack 3,5 stereo connector with metal body and nickel contacts.</p>
					
NYS240BG	TN416	4		10 pc.	<p>Connettore Jack stereo femmina 3,5 con corpo in metallo nero e contatti dorati.</p> <p>Female Jack 3,5 stereo connector with black metal body and gold contacts.</p>
					
NYS322	TN421	6.5		10 pc.	<p>Connettore DIN maschio 5 poli con corpo in metallo e contatti argentati.</p> <p>Male DIN 5 pin connector with metal body and silver contacts.</p>
					
NYS322AG	TN601	6.5		10 pc.	<p>Connettore DIN maschio 5 poli con corpo e contatti dorati.</p> <p>Male DIN 5 pin connector with gold body and contacts.</p>
					
NYS322G	TN422	6.5		10 pc.	<p>Connettore DIN maschio 5 poli con corpo e contatti dorati.</p> <p>Male DIN 5 pin connector with metal body and gold contacts.</p>
					

Neutrik Code	Tasker Code	Associated	Ø Cable (mm)	Packaging	Description
NYS367-*	*0 Black/TN425 *2 Red/TN446 *4 Yellow/TN447 *5 Green/TN503 *6 Blue/TN504 *9 White/TN449			10 pc.	 Connettore RCA femmina da pannello con corpo in metallo e contatti dorati.  Female RCA panel connector with metal body and gold contacts.



NYS373-*	*0 Black/TN426 *2 Red/TN427 *4 Yellow/TN428 *5 Green/TN429 *6 Blue/TN430 *9 White/TN431		3.5÷ 6.1	10 pc.	Connettore RCA maschio con corpo in plastica e contatti dorati. Male RCA panel connector with plastic body and gold contacts.
-----------------	--	--	----------	--------	--



SCDP-0	TN604			10 pc.	Guarnizione nera contro acqua e polvere per flange di tipo D. Dust and water black seal for D shape panel connectors.
---------------	--------------	--	--	--------	--



SCDX	TN448			10 pc.	Copertura contro acqua e polvere per connettori a pannello con flangia di tipo D. Dust and water cover for D shape panel connectors.
-------------	--------------	--	--	--------	---




SCF	TN456			10 pc.	Copertura contro la polvere per connettori femmina da pannello tipo XLR, etherCON, BNC e RCA. Dust cover for female XLR, etherCON, BNC and RCA pannel connectors.
------------	--------------	--	--	--------	--



SCM	TN457			10 pc.	Copertura contro la polvere per connettori XLR femmina da pannello femmina. Dust cover for female XLR pannel connectors.
------------	--------------	--	--	--------	---



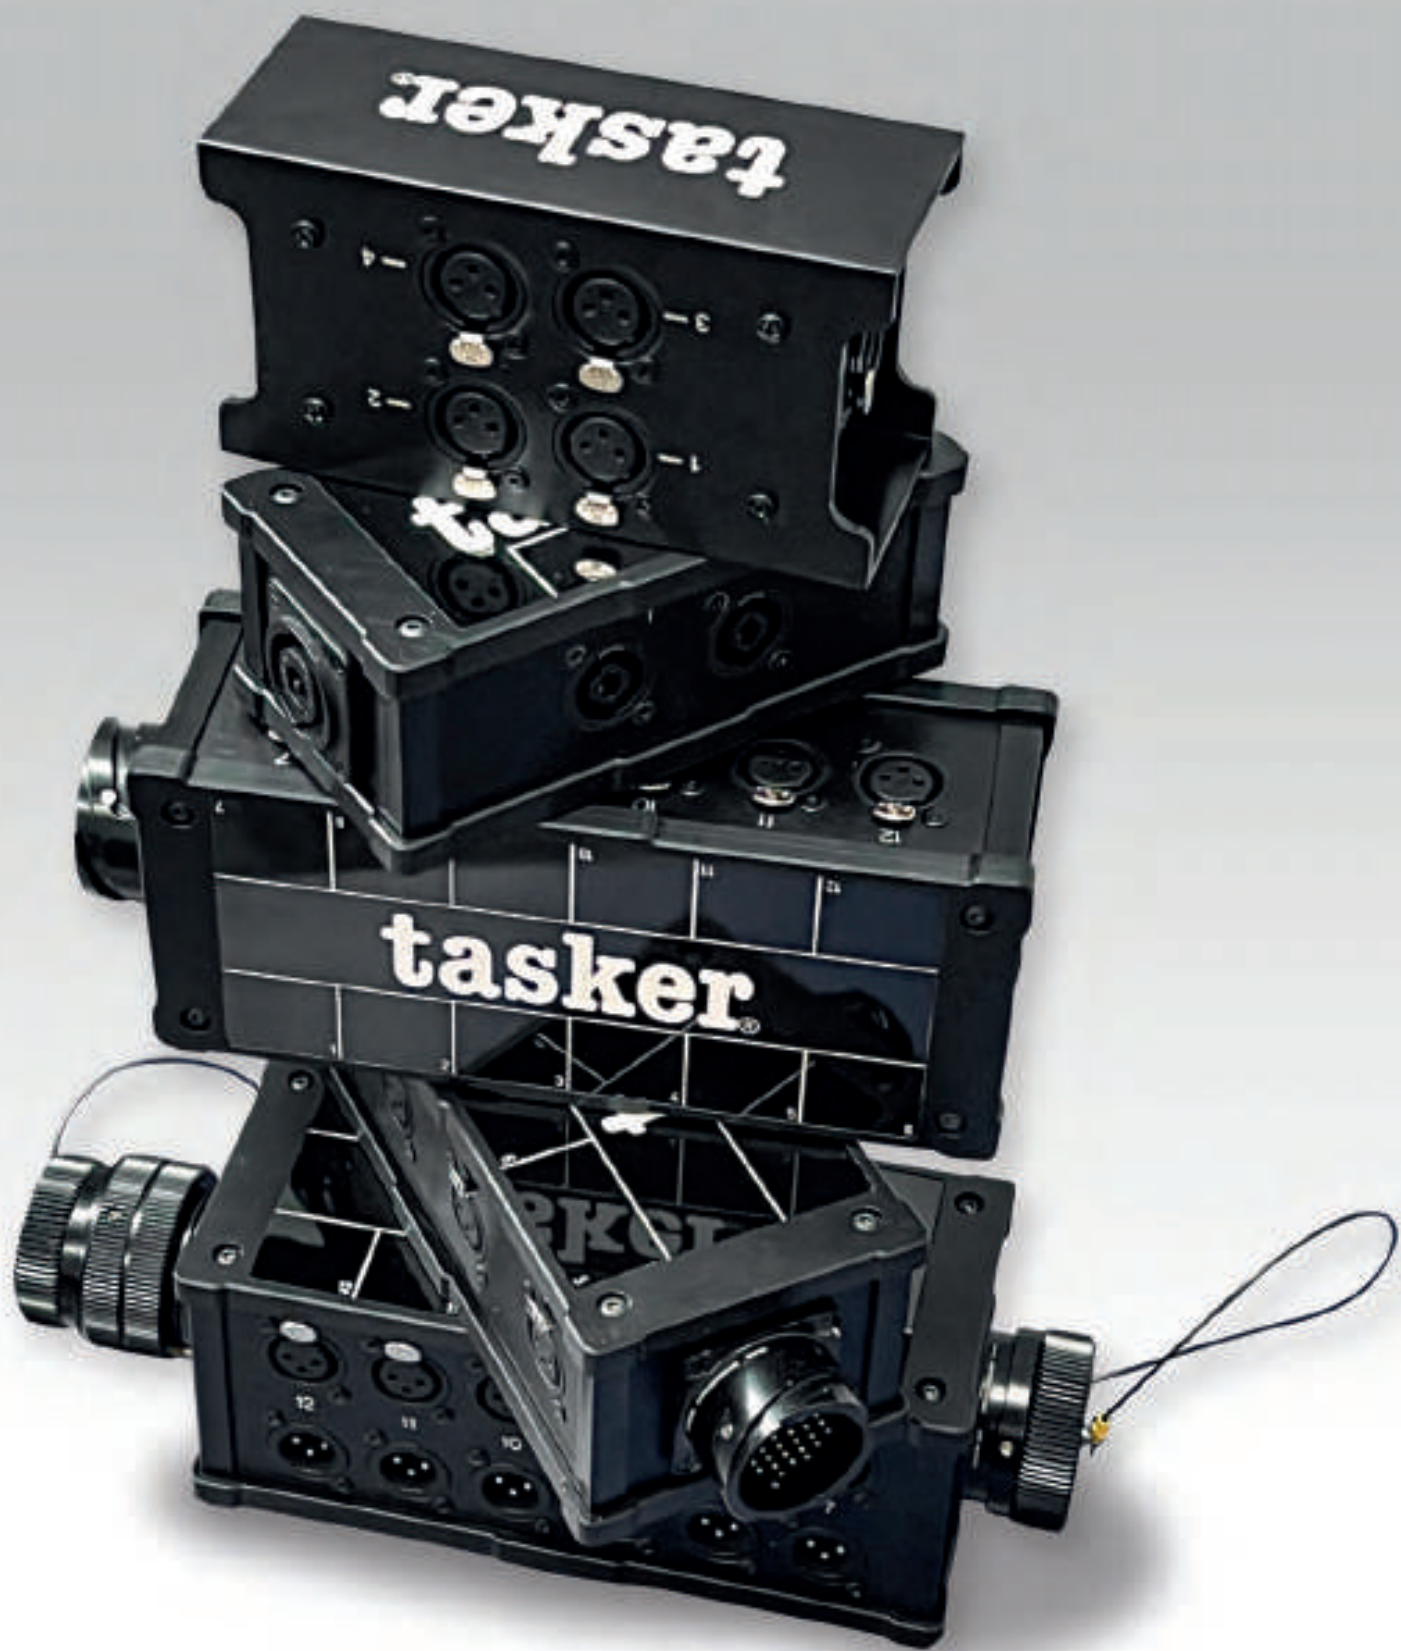





PROFESSIONAL
STAGE BOXES

Customized Professional Heavy Duty Stageboxes and Breakout Boxes for Outdoor/ Indoor Application

Each piece is fully customizable



Code	Dimensions	Connectors	Description	Description
SB 3712 F12MLPF	214x92x94 mm	12xNC3FD-LX-BAG	<p>  Stagebox con connettori Neutrik XLR da pannello, 12 femmina e 12 maschio + 2 connettore multipin Syntax da 37 contatti, uno maschio e uno femmina. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia.</p>	<p> Stagebox with Neutrik XLR panel connectors, 12 female and 12 male + 2 Syntax multipin connector with 37 contacts, one male and one female. Unbreakable aluminium and polyethylene frame per OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.</p>
		12xNC3MD-LX-BAG		
		1xSWK037MP		
		1xSWK037FP		
				

SB DMXNE8F4	154x80x60 mm	4xNC3FD-LX-BAG	<p>Breakout box con 4 connettori Neutrik XLR femmina da pannello e 1 connettore Neutrik EtherCON Cat.5e femmina da pannello. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Ideale per applicazioni a protocollo DMX e Dante.</p>	<p>Breakout box with 4 female Neutrik XLR panel connectors and 1 female Neutrik etherCON Cat5e female panel connector. Unbreakable aluminium and polyethylene frame per OUTDOOR/INDOOR application customizable with laser marking and numbering. Ideal for DMX and Dante protocol applications.</p>
		1xNE8FDP-B		
				

SB NL8NL4	156x82x61 mm	4xNL4MP	<p>Breakout box con 4 connettori Neutrik speakON femmina 4 poli da pannello e 1 connettore Neutrik SpeakON femmina 8 poli da pannello. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Ideale per il cablaggio dei cavi cassa multipolari.</p>	<p>Breakout box with 4 female Neutrik SpeakON 4 pole panel connectors and 1 female Neutrik speakON 8 pole female panel connector. Unbreakable aluminium and polyethylene frame per OUTDOOR/INDOOR application customizable with laser marking and numbering. Ideal for multipolar speaker cables wiring.</p>
		1xNL8MPR-BAG		
				



AZIENDA CERTIFICATA UNI EN ISO 9001



RoHS2 2002/95/EC 2011/65/UE



OFC COPPER

tasker

...a project further...

Accessories 5

www.taskercables.com

Customized Professional Heavy Duty Stageboxes and Breakout Boxes for Outdoor/ Indoor Application

Each piece is fully customizable



Code	Dimensions	Connectors	Description	Description
SB 258 FLPF	214x92x74 mm	8xNC3FD-LX-BAG 1xSWK025MP 1xSWK025FP		<p>Stagebox con 8 connettori Neutrik XLR femmina da pannello e 2 connettori multipin Syntax da 25 contatti, uno maschio e uno femmina. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia.</p> <p>Stagebox with 8 female Neutrik XLR panel connectors and 2 Syntax multipin connectors with 25 contacts one male and one female. Unbreakable aluminium and polyethylene frame for OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.</p>

SB 3712 F	214x92x94 mm	12xNC3FD-LX-BAG 1xSWK037MP		<p>Stagebox con 12 connettori Neutrik XLR femmina da pannello e 1 connettore multipin Syntax maschio da 37 contatti. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia.</p> <p>Stagebox with 12 female Neutrik XLR panel connectors and 1 Syntax male multipin connector with 37 contacts. Unbreakable aluminium and polyethylene frame for OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.</p>
------------------	--------------	-------------------------------	---	--

SB 3712 F12M	214x92x94 mm	12xNC3FD-LX-BAG 12xNC3MD-LX-BAG 1xSWK037FP		<p>Stagebox con connettori Neutrik XLR da pannello, 12 femmina e 12 maschio + 1 connettore multipin Syntax maschio da 37 contatti. Corpo in alluminio e polietilene indistruttibile per applicazioni OUTDOOR/INDOOR, personalizzabile con marcatura e numerazioni laser. Cappuccio di copertura per i connettori multipin fornibile su richiesta. Ideale per il cablaggio dei cavi multicoppia.</p> <p>Stagebox with Neutrik XLR panel connectors, 12 female and 12 male + 1 Syntax male multipin connector with 37 contacts. Unbreakable aluminium and polyethylene frame per OUTDOOR/INDOOR application customizable with laser marking and numbering. Protection cap for multipin connectors available on demand. Ideal for multipair cables wiring.</p>
---------------------	--------------	--	--	---



TASKER

MADE IN ITALY

+ 2x0.50 + 2x0.75 mm²

Digital Video + Control + Power

Digital Video + Control + Power

MADE IN ITALY


TASKER

NEUTRIK

NEUTRIK

Empty Cable Drums

SO SERIES

Code	Drum O.D. (mm)	Packaging	Description
GT235SO	235	1 pc.	<p> Avvolgicavo Schill professionale in polimero termoplastico ultra leggero ad alta resistenza. Realizzato con maniglia e piedini di supporto integrati. Adatto a ogni condizione lavorativa sia INDOOR che OUTDOOR. Disponibile con diversi diametri da 235 a 450 mm, tutte con frizione regolabile. La serie SO presenta un pannello frontale liscio e rimovibile che da la possibilità di applicare diversi connettori a pannello in base alle diverse esigenze operative.</p> <p> Light and high resistant thermoplastic polymer Schill cable drum. Made with handle and support feet integrated. Suitable for any working conditions, both INDOOR or OUTDOOR. Available with different diameters from 235 to 450 mm, all with adjustable clutch. The SO series has a smooth and removable front panel that gives the possibility to apply different panel connectors according to different operational needs.</p>
GT310SO	310	1 pc.	
GT380SO	380	1 pc.	
SK380SO	380	1 pc.	
GT450SO	450	1 pc.	



RM SERIES

Code	Drum O.D. (mm)	Packaging	Description
GT235RM	235	1 pc.	<p>Avvolgicavo Schill professionale in polimero termoplastico ultra leggero ad alta resistenza. Realizzato con maniglia e piedini di supporto integrati. Adatto a ogni condizione lavorativa sia INDOOR che OUTDOOR. Disponibile con diversi diametri da 235 a 450 mm, tutte con frizione regolabile. La serie RM presenta da 2 a 4 alette di avvolgitura ausiliaria che danno la possibilità di porre parte del cavo o i connettori più ingombranti in maniera ordinata.</p> <p>Light and high resistant thermoplastic polymer Schill cable drum. Made with handle and support feet integrated. Suitable for any working conditions, both INDOOR or OUTDOOR. Available with different diameters from 235 to 450 mm, all with adjustable clutch. The RM series has from 2 to 4 auxiliary winding tabs that give the possibility to place properly tidily part of the cable or the bulky connectors.</p>
GT310RM	310	1 pc.	
GT380RM	380	1 pc.	
SK380RM	380	1 pc.	
GT450RM	450	1 pc.	



MFK SERIES

Code	Drum O.D. (mm)	Packaging	Description
GT310MFK	310	1 pc.	<p>Avvolgicavo Schill professionale in polimero termoplastico ultra leggero ad alta resistenza. Realizzato con maniglia e piedini di supporto integrati. Adatto a ogni condizione lavorativa sia INDOOR che OUTDOOR. Disponibile con diversi diametri da 310 a 450 mm, tutte con frizione regolabile. La serie MFK presenta uno sportello con 1 o 2 cardini per riporre in uno spazio protetto i connettori che richiedono particolare attenzione.</p> <p>Light and high resistant thermoplastic polymer Schill cable drum. Made with handle and support feet integrated. Suitable for any working conditions, both INDOOR or OUTDOOR. Available with different diameters from 310 to 450 mm, all with adjustable clutch. The MFK series has a door with 1 or 2 hinges to store the connectors that require particular attention in a protected space.</p>
GT380MFK	380	1 pc.	
SK380MFK	380	1 pc.	
GT450MFK	450	1 pc.	



Empty Cable drums

Come individuare l'avvolgicavo adatto al tuo cavo seguendo il diametro:

How to choose the right cable drum basing on the cable diameter:

Cable Diam.Ø	GT235	GT310	GT380/SK380	GT450
mm	m	m	m	m
7,00	60	135	249	301
8,00	45	96	190	240
9,00	34	73	153	185
11,00	23	54	92	118
12,00	20	41	86	104
13,00	13	37	67	81
14,00	12	33	62	75
15,00	12	24	46	55
17,00	6	21	38	51
20,00	5	13	25	31
23,00	4	11	20	27
25,00	4	7	13	16

Display

Code	Packaging	Description
T306A	1 pc.	<p> Espositore rotante in plastica e metallo a 3 lati con 15 ganci per cavi pre-assemblati.</p> <p> Plastic and Metal rotating display with 3 sides and 15 hooks for pre-assembled cables.</p>



Display

Code	Packaging	Description
T307A	1 pc.	<p> Espositore in cartone ondulato con dodici ganci metallici per l'esposizione di cavi preassemblati.</p> <p> Corrugated cardboard display with twelve metal hooks for pre-made cables.</p>



Premade Cable Drums for Heavy Duty - Audio and DMX



Code	Length (m)	Drum	Cable	Section	Connectors	Description
GT33DPV	50	GT235RM	TSK1038 PUR	2x0,35mm ²	NC3MX-B NC3FX-B	<p> </p> <p>Avvolgicavo schill professionale cablato con cavo tasker TSK1038 PUR e connettori Neutrik neri per interconnettere apparati audio e luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable TSK1038 PUR and black Neutrik connectors for interconnection of Audio equipments and DMX lights. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	100	GT310RM				



Notes Available also with Neutrik XLR 5 pin connectors NC5MX-B and NC5FX-B. tasker code GT35DPV.

GT33DPN	50	GT235SO	TSK1038 PUR	2x0,35mm ²	NC3MD-LX-B NC3FX-B	<p>Avvolgicavo schill professionale cablato con cavo tasker TSK1038 PUR e connettori Neutrik neri per interconnettere apparati audio e luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable TSK1038 PUR and black Neutrik connectors for interconnection of Audio equipments and DMX lights. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	100	GT310SO				



Notes Available also with Neutrik XLR 5 pin connectors NC5MD-L-B-1 and NC5FX-B. Tasker code GT35DPN.

GT55DPV	50	GT310RM	C862	2x2X0,35mm ²	NC5MX-B NC5FX-B	<p>Avvolgicavo schill professionale cablato con cavo tasker C862 e connettori Neutrik neri per interconnettere apparati luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C862 and black Neutrik connectors for DMX lights interconnection. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	100	GT380RM				



GT55DPN	50	GT310SO	C862	2x2X0,35mm ²	NC5MD-LX-B NC5FX-B	<p>Avvolgicavo schill professionale cablato con cavo tasker C862 e connettori Neutrik neri per interconnettere apparati luci DMX. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C862 and black Neutrik connectors for DMX lights interconnection. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	100	GT380SO				



Custom production on demand



tasker

...a project further...

Accessories 5

www.tasker.it

Premade Cable Drums for Heavy Duty - Video



Code	Length (m)	Drum	Cable	Section	Connectors	Description
GT42CPV	50 100	GT235RM GT310RM	T42 PUR	7x0,40/4,80/7,10 mm (1x0,88 mm ² - 75Ω)	NBNC75BWU13 NBNC75BWU13	<p> </p> <p>Avvolgicavo schill professionale cablato con cavo tasker T42 PUR e connettori Neutrik per interconnettere apparati video HD-SDI fino a 12GHz. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable T42 PUR and Neutrik connectors for interconnection of HD-SDI video equipments over 12GHz. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
GT42CPN	50 100	GT235SO GT310SO	T42 PUR	7x0,40/4,80/7,10 mm (1x0,88 mm ² - 75Ω)	NBB75DSGB NBNC75BWU13	<p>Avvolgicavo schill professionale cablato con cavo tasker T42 PUR e connettori Neutrik per interconnettere apparati video HD-SDI fino a 12GHz. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable T42 PUR and Neutrik connectors for interconnection of HD-SDI video equipments over 12GHz. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
GT11TPV	50 100	GT380RM GT450RM	TR11 PUR Extraflex	19x0,28/6,40/8,60/11,00 mm (1x1,17 mm ² - 75Ω)	SE1051 KE1051	<p>Avvolgicavo schill professionale cablato con cavo tasker TR11 PUR Extraflex e connettori Fischer per interconnettere apparati broadcast professionali. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable TR11 PUR Extraflex and Fischer connectors for interconnection of broadcast equipments. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
GT11TPN	50 100	GT380SO GT450SO	TR11 PUR Extraflex	19x0,28/6,40/8,60/11,00 mm (1x1,17 mm ² - 75Ω)	DBQ1051 SE1051	<p>Avvolgicavo schill professionale cablato con cavo tasker TR11 PUR Extraflex e connettori Fischer per interconnettere apparati broadcast professionali. Ideale per installazioni OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable TR11 PUR Extraflex and Fischer connectors for interconnection of broadcast equipments. Ideal for OUTDOOR installations thanks to the extreme resistance of all the components.</p>

Custom production on demand



tasker

...a project further...

Accessories 5

www.taskercables.com

New Optical Premade Cables for Audio and Broadcast



Cable	Length (m)	Code	Drum	Connectors	Description
Optical fiber Multi Mode 2 channel OM3 50/125 µm	50	NEU-NK02M-A-2-50	GT310		<p> Avvolgicavo professionale Schill assemblato con fibra ottica extra robusta e connettori Neutrik OpticalCON per la trasmissione del segnale fino a 10 Gbit/s. Ideale per broadcast, sistemi integrati ed eventi live.</p>
	100	NEU-NK02M-A-2-100	GT310		
	200	NEU-NK02M-A-2-200	GT310		
Optical fiber Multi Mode 4 channel OM3 50/125 µm	50	NEU-NK04M-A-2-50	GT310		<p> Schill professional cable drum assembled with extra rugged optical fiber and Neutrik OpticalCON connectors for signal transmission over 10 Gbit/s. Ideal for broadcast, system integration and live event installation.</p>
	100	NEU-NK04M-A-2-100	GT310		
	200	NEU-NK04M-A-3-200	GT380		
Hybrid Optical fiber SMTP E Cable	50	GTSMPTESFPVV-50	GT310		<p>Avvolgicavo professionale Schill assemblato con fibra ottica extra robusta e connettori Lemo per la connessione di telecamere broadcast ad alta risoluzione secondo il protocollo SMPTE.</p>
	100	GTSMPTESFPVV-100	GT380		
	200	GTSMPTESFPVV-200	GT385		

2 Channel Optical Fiber

4 Channel Optical Fiber

Hybrid SMPE Cable



Custom production on demand



tasker

...a project further...

Accessories 5

www.tasker.it

Premade Cable Drums for Heavy Duty – Cat. 5e, Cat.6A and Cat.7



Code	Length (m)	Drum	Cable	Section	Connectors	Description
GT25LPV	50	GT310RM	C725 PUR	4x2x0,15 mm ²	NE8MX-B NE8MX-B	<p>Avvolgicavo schill professionale cablato con cavo tasker C725 PUR e connettori Neutrik neri per interconnettere apparati audio digitali e LAN Cat.5e. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C725 PUR and black Neutrik connectors for interconnection of digital audio equipments and Cat.5e LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	75	GT310RM				
100	GT380RM					
GT25LPN	50	GT310SO	C725 PUR	4x2x0,15 mm ²	NE8FDP-B NE8MX-B	<p>Avvolgicavo schill professionale cablato con cavo tasker C725 PUR e connettori Neutrik neri per interconnettere apparati audio digitali e LAN Cat.5e. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C725 PUR and black Neutrik connectors for interconnection of digital audio equipments and Cat.5e LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	75	GT310SO				
100	GT380SO					
GT28LPV	50	GT310RM	C728 PUR	4x2x0,22 mm ²	NE8MX6-B NE8MX6-B	<p>Avvolgicavo schill professionale cablato con cavo tasker C728 PUR e connettori Neutrik neri per interconnettere apparati video digitali e LAN Cat.6A. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C728 PUR and black Neutrik connectors for interconnection of digital video equipments and Cat.6A LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	75	GT380RM				
100	GT380RM					
GT28LPN	50	GT310SO	C728 PUR	4x2x0,22 mm ²	NE8FDX-P6-B NE8MX6-B	<p>Avvolgicavo schill professionale cablato con cavo tasker C728 PUR e connettori Neutrik neri per interconnettere apparati video digitali e LAN Cat.6A. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C728 PUR and black Neutrik connectors for interconnection of digital video equipments and Cat.6A LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	75	GT380SO				
100	GT380SO					
GT26LPV	50	GT310RM	C726 PUR	4x2x0,14 mm ²	NE8MX6-B-T NE8MX6-B-T	<p>Avvolgicavo schill professionale cablato con cavo tasker C726 PUR e connettori Neutrik neri per interconnettere apparati LAN Cat.7 ad alta velocità. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C726 PUR and black Neutrik connectors for interconnection of high speed Cat.7 LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	75	GT310RM				
100	GT310RM					
GT26LPN	50	GT310SO	C726 PUR	4x2x0,14 mm ²	NE8FDX-P6-B NE8MX6-B-T	<p>Avvolgicavo schill professionale cablato con cavo tasker C726 PUR e connettori Neutrik neri per interconnettere apparati LAN Cat.7 ad alta velocità. Ideale per installazioni anche OUTDOOR grazie all'estrema robustezza di tutti i componenti.</p> <p>Schill professional cable drum assembled with tasker cable C726 PUR and black Neutrik connectors for interconnection of high speed Cat.7 LAN. Ideal also for OUTDOOR installations thanks to the extreme resistance of all the components.</p>
	75	GT310SO				
100	GT310SO					

Custom production on demand



tasker

...a project further...

Accessories 5

www.taskercables.com



tasker®



tasker


...a project further...

Accessories 5

www.tasker.it

New Special accessories - Heat Shrink Tubes


1m Heat - Shrink tubes 2:1

Code	Length (m)	Inner Diam. at delivery (mm)	Max Inner Diam. after heating (mm)	Packaging (pc.)	Standard Colors	Colors on demand	Description
GTM1206	1	1,2	0,6	50	Colors: Black BK	Colors: Violet V	 <p>Guaina termorestringente in poliolefina reticolata con fattore di restringimento 2:1. Ritardante la fiamma con temperatura operativa di -55/+125°C. UL/CSA Standard.</p> <p>Heat shrink tube in cross-linked polyolefin with shrinkage factor of 2:1. Flame retardant with operative temperature of -55/+125°C. UL/CSA Standard.</p>
GTM1608	1	1,6	0,8	50	Colors: Blue B	Colors: Brown BR	
GTM2412	1	2,4	1,2	50	Colors: White W	Colors: Grey GY	
GTM3216	1	3,2	1,6	50	Colors: Red R		
GTM4824	1	4,8	2,4	50	Colors: Transparent TR		
GTM6432	1	6,4	3,2	50	Colors: Orange O		
GTM9548	1	9,5	4,8	50	Colors: Yellow Y		
GTM1264	1	12,7	6,4	25	Colors: Green G		
GTM1680	1	16,0	8,0	25			
GTM1995	1	19,0	9,5	25			
GTM2512	1	25,4	12,7	25			
GTM32016	1	32,0	16,0	10			
GTM3819	1	38,1	19,0	10			
GTM5025	1	50,8	25,4	5			

Heat - Shrink tubes 2:1 on Boxes


Code	Length (m)	Inner Diam. at delivery (mm)	Max Inner Diam. after heating (mm)	Packaging (pc.)	Standard Colors	Colors on demand	Description
BOX1206	1,2	1,2	0,6	10	Colors: Black BK	Colors: Violet V	 <p>Guaina termorestringente in poliolefina reticolata con fattore di restringimento 2:1. Ritardante la fiamma con temperatura operativa di -55/+125°C. UL/CSA Standard.</p> <p>Heat shrink tube in cross-linked polyolefin with shrinkage factor of 2:1. Flame retardant with operative temperature of -55/+125°C. UL/CSA Standard.</p>
BOX1608	1,6	1,6	0,8	10	Colors: Blue B	Colors: Brown BR	
BOX2412	2,4	2,4	1,2	10	Colors: White W	Colors: Grey GY	
BOX3216	3,2	3,2	1,6	10	Colors: Red R		
BOX4824	4,8	4,8	2,4	10	Colors: Transparent TR		
BOX6432	6,4	6,4	3,2	5	Colors: Orange O		
BOX9548	9,5	9,5	4,8	5	Colors: Yellow Y		
BOX1264	12,7	12,7	6,4	5	Colors: Green G		
BOX1680	16,0	16,0	8,0	5			
BOX1995	19,0	19,0	9,5	5			
BOX2512	25,4	25,4	12,7	5			

Heat - Shrink tubes 2:1 on Reels


Code	Length (m)	Inner Diam. at delivery (mm)	Max Inner Diam. after heating (mm)	Packaging (pc.)	Standard Colors	Colors on demand	Description
GTB1206	1,2	1,2	0,6	150	Colors: Black BK	Colors: Violet V	 <p>Guaina termorestringente in poliolefina reticolata con fattore di restringimento 2:1. Ritardante la fiamma con temperatura operativa di -55/+125°C. UL/CSA Standard.</p> <p>Heat shrink tube in cross-linked polyolefin with shrinkage factor of 2:1. Flame retardant with operative temperature of -55/+125°C. UL/CSA Standard.</p>
GTB1608	1,6	1,6	0,8	150	Colors: Blue B	Colors: Brown BR	
GTB2412	2,4	2,4	1,2	150	Colors: White W	Colors: Grey GY	
GTB3216	3,2	3,2	1,6	150	Colors: Red R		
GTB4824	4,8	4,8	2,4	75	Colors: Transparent TR		
GTB6432	6,4	6,4	3,2	75	Colors: Orange O		
GTB9548	9,5	9,5	4,8	75	Colors: Yellow Y		
GTB1264	12,7	12,7	6,4	50	Colors: Green G		
GTB1680	16,0	16,0	8,0	50			
GTB1995	19,0	19,0	9,5	30			
GTB2512	25,4	25,4	12,7	30			
GTB32016	32,0	32,0	16,0	30			
GTB3819	38,1	38,1	19,0	30			
GTB5025	50,8	50,8	25,4	30			
GTB7638	76,2	76,2	38,1	15			
GTB10250	102,0	102,0	50,8	15			
GTB12663	126,0	126,0	63,5	15			
GTB15076	150,0	150,0	76,0	15			

Heat - Shrink tubes 3:1 with glue

Heat - Shrink Tubes with glue 3:1 on Boxes



Code	Inner Diam. at delivery (mm)	Max inner Diam. after heating (mm)	Packaging (m)	Code Color	Description
BOXC3010	3,00	1,00	5	Colors: Black BK	 <p>Guaina termorestringente in poliolefina reticolata con adesivo applicato in contro-estrusione e fattore di restringimento 3:1. Ritardante la fiamma, resistente UV, con temperatura operativa -55°C/+125°C. UL/CSA Standard.</p> <p>Heat shrink tube in cross-linked polyolefin with glue applied in counter-extrusion and shrinkage factor of 3:1. Flame Retardant with operative temperature of -55/+125°C. UL/CSA Standard.</p>
BOXC4816	4,80	1,60	4		
BOXC6020	6,00	2,00	3,5		
BOXC9030	9,00	3,00	3		
BOXC1240	12,00	4,00	2,5		
BOXC1963	19,00	6,33	2		
BOXC2480	24,00	8,00	1,5		

Heat - Shrink Tubes with glue 3:1 on Reels


Code	Inner Diam. at delivery (mm)	Max inner Diam. after heating (mm)	Packaging (m)	Code Color	Color on Request	Description
GTBC3010	3,00	1,00	150	Colors: Black BK	Colors: Red R	 <p>Guaina termorestringente in poliolefina reticolata con adesivo applicato in contro-estrusione e fattore di restringimento 3:1. Ritardante la fiamma, resistente UV, con temperatura operativa -55°C/+125°C. UL/CSA Standard.</p> <p>Heat shrink tube in cross-linked polyolefin with glue applied in counter-extrusion and shrinkage factor of 3:1. Flame Retardant with operative temperature of -55/+125°C. UL/CSA Standard.</p>
GTBC4816	4,80	1,60	75		Colors: Green G	
GTBC6020	6,00	2,00	75		Colors: Blue B	
GTBC9030	9,00	3,00	50		Colors: Transparent TR	
GTBC1240	12,00	4,00	30		Colors: White W	
GTBC1963	19,00	6,33	30		Colors: Yellow Y	
GTBC2480	24,00	8,00	30			
GTBC30010	30,00	10,00	30			
GTBC4013	40,00	13,33	30			

New Special accessories - Cable Ties


Cable Ties

Code	Length (mm)	Width (mm)	Max tightening Diam. (mm)	Weight hold (Kg)	Packaging (pc.)	Standard Colors	Colors on demand	Description
FST8024	80,0	2,4	15,0	8,0	100	Colors: ● Black	Code: BK	 <p>Fascette in Nylon resistenti ai raggi UV e con temperatura operativa di -40/+85°C. Autoestinguenti entro 30 sec. dall'incendio e Certificate UL, ideali per le più svariate applicazioni operative.</p> <p> Nylon cable ties, UV rays resistant with operating temperatures of -40/+85°C. Self-extinguishing within 30 sec. and UL certified. Suitable for different application.</p>
FST10025	100,0	2,5	22,0	8,1	100	○ Natural	NAT	
FST12025	120,0	2,5	30,0	8,1	100	● Green	G	
FST14025	140,0	2,5	33,0	8,1	100	● Blue	B	
FST16025	160,0	2,5	40,0	8,1	100	○ White	W	
FST20025	200,0	2,5	53,0	8,1	100	● Red	R	
FST14036	140,0	3,6	33,0	18,2	100	● Yellow	Y	
FST20036	200,0	3,6	53,0	18,2	100	● Orange	O	
FST30036	300,0	3,6	76,0	18,2	100	○ Transparent	TR	
FST37036	370,0	3,6	102,0	18,2	100			
FST16048	160,0	4,8	38,0	22,2	100			
FST19048	190	4,8	46,0	22,2	100			
FST20048	200	4,8	50,0	22,2	100			
FST25048	250	4,8	60,0	22,2	100			
FST28048	280	4,8	70,0	22,2	100			
FST30048	300	4,8	76,0	22,2	100			
FST37048	370	4,8	102,0	22,2	100			
FST43048	430	4,8	110,0	22,2	100			
FST53048	530	4,8	140,0	22,2	100			


Adhesive bases for Cable Ties

Code	Racomanded ties width (mm)	Length (mm)	High (mm)	Housing thickness (mm)	Hole Diam. (mm)	Packaging (pc.)	Standard Colors	Description
BAD2,5	2,5	12,7	3,2	3,2	-	100	Colors: ● Black	 <p>Basette adesive in Nylon per fascette con temperatura operativa di -40/+85°C. Autoestinguenti entro 30 sec. dall'incendio e Certificate UL, ideali per le più svariate applicazioni operative.</p> <p>Nylon adhesive bases for cable ties, with operating temperatures of -40/+85°C. Self-extinguishing within 30 sec. and UL certified. Suitable for different application.</p>
BAD3,6	3,6	19,0	4,4	4,0	3,5	100	○ Natural	
BAD4,8	4,8	27,7	5,7	5,3	5,7	100		

Saddle support for Cable Ties


Code	Racomanded ties width (mm)	Length (mm)	Width (mm)	High (mm)	Hole Diam. (mm)	Packaging (pc.)	Standard Colors	Description
BSL3,7	4,8	14,9	9,5	7,2	3,7	100	Colors: ● Black	 <p>Supporti a sella in Nylon per fascette con temperatura operativa di -40/+85°C. Autoestinguenti entro 30 sec. dall'incendio e Certificate UL, ideali per le più svariate applicazioni operative.</p> <p>Nylon saddle support for cable ties, with operating temperatures of -40/+85°C. Self-extinguishing within 30 sec. and UL Certified. Suitable for different application.</p>
BSL4,5	4,8	14,9	9,5	7,2	4,5	100	○ Natural	

Tools for Cable Ties

TFT1		Tira-fascette in metallo rosso per spessori fino a 4,8 mm con taglio automatico a fine regolazione.	Red metal tie gun for thicknesses up to 4.8 mm with automatic cutting at the end of the adjustment.
TFT114		Tira-fascette in metallo rosso per spessori da 3,6 a 9,5 mm, con leva per il taglio manuale della fascetta a fine regolazione.	Red metal tie gun for thicknesses from 3.6 to 9.5, with lever for manual cutting at the end of the adjustment.

New Special accessories - Sleeves and Tape

Braided Sleeves

Code	Min. Diam. (mm)	Inner Diam. at delivery (mm)	Max. Diam. (mm)	Packaging (m)	Standard Colors	Description
CTR8	5,0	8,0	12,0	100	Colors:  Black	Code: BK
CTR10	7,0	10,0	15,0	100		
CTR12	6,0	12,0	20,0	100		
CTR15	8,0	15,0	23,0	100		
CTR20	12,0	20,0	30,0	100		
CTR25	18,0	25,0	34,0	100		
CTR30	20,0	30,0	40,0	100		
CTR40 CTR50	25,0 45,0	40,0 50,0	60,0 75,0	100 100		




Spiral Sleeves


Code	Min. Diam. (mm)	Inner Diam. at delivery (mm)	Max. Diam. (mm)	Packaging (m)	Standard Colors	Description
CSP8	7,5	8,5	60,0	10	Colors:  Black  Natural	Code: BK NAT
CSP10	9,0	10,2	65,0	10		
CSP13	12,0	13,0	70,0	10		
CSP16	15,0	16,4	100,0	10		



Velcro Tape

Code	Diam. (mm)	Packaging (m)	Standard Colors	Description
VEL12	12	25	Colors:  Black	Code: BK
VEL20	20	25		



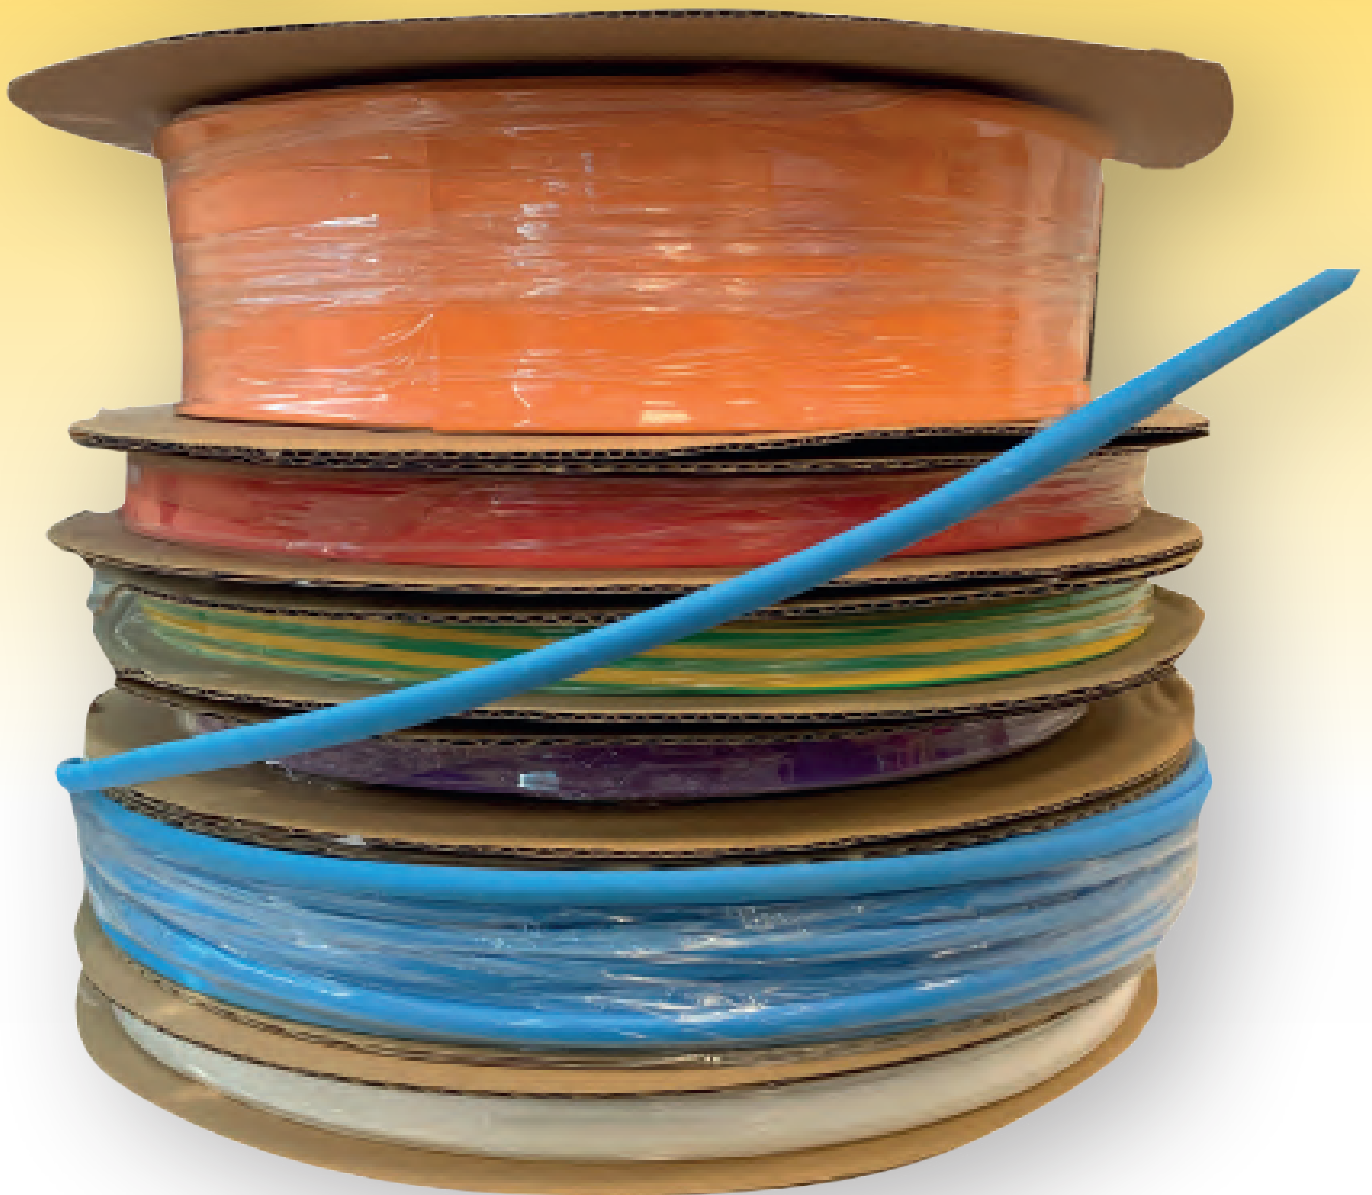

AZIENDA
CERTIFICATA
UNI EN ISO
9001



RoHS2
2002/95/EC
2011/65/UE



tasker

...a project further...

www.tasker.it

Accessories 5



tasKet®

FREE EXPRESSION IN
FREE SPACES





AZIENDA
CERTIFICATA
UNI EN ISO
9001



RoHS₂
2002/95/EC
2011/65/UE



tasker

...a project further...

Accessories 5

www.taskercables.com



Audio Cables

- EXTRAFLEX SPEAKER CABLES
- FLAT AUDIO CABLES
- GUITAR CABLES
- UNBALANCED AUDIO - MICROPHONE CABLES
- SPIRAL SHIELDED - MICROPHONE CABLES
- BRAIDED SHIELDED - MICROPHONE CABLES
- MULTIPAIR AUDIO CABLES
- DIGITAL AUDIO DMX CABLES 110Ω
- SHIELDED CABLES FOR DMX 512 - EIA RS 485-120Ω
- SHIELDED CABLES FOR DMX 512 - EIA RS 422-100Ω
- EXTRAFLEX DIGITAL MULTIPAIR AUDIO CABLES 110Ω
- DMX 100Ω KOMBY CABLES AND ACTIVE LOUDSPEAKERS
- ETHERNET DIGITAL AUDIO CABLES
- MINIATURE AUDIO CABLES
- SHIELDED CABLES FOR AUDIO/SWITCH CONTROLS
- DIVISIBLE SHIELDED FLAT AUDIO CABLES



Data/Network Cables

- EXTRAFLEX WIRING TWISTED CABLE
- MULTICOLOUR CABLES
- FLEX SHEATHED CABLES
- EXTRA FLEX SHEATHED CABLES
- FLAT CABLES UL STYLE 2651 - 28 AWG/PITCH mm.1,27
- COAX CABLES RG 50Ω - Mil Standards
- COAXIALCABLES for Wi-Fi and RG 50Ω - LOW LOSS
- KOMBY CABLES - DIGITAL VIDEO 50Ω + POWER
- KOMBY CABLES - DIGITAL VIDEO 50Ω + CONTROL + POWER
- KOMBY CABLES - MULTI DIGITAL VIDEO 50Ω + SWITCH
- FLAT TELEPHONE CABLES
- ETHERNET DIGITAL CABLES (cat. 5e/cat.6A/cat.7)
- SPECIAL ETHERNET DIGITAL CABLES
- KOMBY CABLES
- SHIELDED CABLES FOR DMX 512 EIA RS 422
- SHIELDED CABLES FOR DMX 512 EIA RS 485
- NETBUS CABLES - LonWorks™
- USB CABLES
- SHIELDED TWISTED PAIR CABLES
- LIYCY CABLES
- SPIRAL SHIELDED CABLES
- BRAIDED SHIELDED CABLES
- ALARM CABLES



Video Cables

- COAXIAL VIDEO CABLES 75Ω
- TRIAXIAL VIDEO CABLES 75Ω
- COAXIAL DIGITAL SAT. CABLES 75Ω
- COAXIAL DIGITAL VIDEO CABLES 75Ω
- COAXIAL HD-SDI DIGITAL VIDEO CABLES 75Ω
- HDMI CABLES
- VIDEO SECURITY CABLES 75Ω
- HD-SDI VIDEO SECURITY CABLES 75Ω
- KOMBY CABLES - VIDEO 75Ω + AUDIO
- SPECIAL KOMBY - VIDEO CABLES
- SPECIAL KOMBY - HD-SDI VIDEO CABLES
- MULTI VIDEO 75Ω



Audio/Video/Broadcast Accessories

- CONNECTORS
- ASSEMBLED CABLES
- ACCESSORIES



Cables for Electronics

- UNIPOLAR FLEXIBLE CABLES
- UNIPOLAR STIFF WIRE CABLE
- EXTRA-FLEX UNIPOLAR CABLES
- SPECIAL UNIPOLAR CABLES
- EXTRA-FLEX WIRING TWISTED CABLE
- MULTICOLOUR CABLES
- EXTRA FLEX SHEATHED CABLES
- FLEX SHEATHED CABLES
- FLAT AUDIO CABLES FOR HOME CINEMA, LOUDSPEAKERS AND HI-FI
- SHEATHED SPEAKER CABLES
- TWISTED SPEAKER CABLES FOR FIXED INSTALLATION
- ULTRA-THIN - MINIATURE FLAT CABLE
- ULTRA-THIN - MINIATURE ROUND CABLES
- DIVISIBLE SHIELDED FLAT AUDIO CABLES
- SPIRAL SHIELDED CABLES
- KOMBY CABLES - SPIRAL SHIELDED
- FLAT CABLES UL STYLE 2651 - 28 AWG / PITCH mm. 1,27
- FLAT TELEPHONE CABLES
- UNIPOLAR FLEXIBLE POWER CABLES H05V-K 300/500 V.
- UNIPOLAR FLEXIBLE POWER CABLES N07V-K 450/750 V.
- POWER CABLES H03VH2-F/H05VH2-F
- POWER CABLES H05W-F 300/500 V.
- POWER CABLES FROR 450/750 V.
- POWER CABLES H07RN-F 450/750 V.
- FLEX MULTIWIRED POWER CABLES 300/500 V.
- LED CABLES - RGB - DMX PROTOCOL 110Ω

