

MILAN S.r.l. a socio unico

**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com


**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet



**FirestoP®**

# tasker® FROR2150 – 2x1,50 mm<sup>2</sup> Power Cable 450/750 V

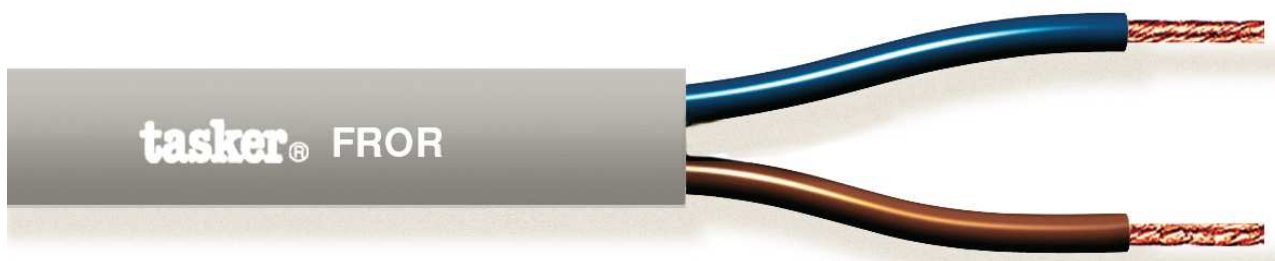

A

B

C

**CATEGORY** Power Cable (See Electronics Catalogue)  
**APPLICATIONS** Energy and electrical installation.

- A:** Grey Flame Retardant **PVC** Sheath with reduced emission of corrosive Gases. Outer cable diam. Ø 9,20 (±0,20) mm.
- B:** Core Insulation with Flame Retardant **PVC** with reduced emission of corrosive Gases. One conductor blue and one brown. Diam. Ø 2,80 (±0,20) mm.
- C:** O.F.C. red copper formation with 0,20 mm elementary wires. Nom. Cross section 2x1,50 mm<sup>2</sup>.

**MARKING** **tasker®** FROR 2150 2x1,50 Energy Cable - CEI 20-22/II IEMMEQU FROR 450/750V - 2x1,50 mm<sup>2</sup>

### Cable Properties

<b>Conductor Resistance</b>	13,30 Ω/Km
<b>Max Rated Voltage Uo/U</b>	450/750 V
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa
<b>Posa</b>	<b>X</b>	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Informazioni</b>	<b>X</b>	Ver. A / 16.05.16