


MILAN S.r.l. a socio unico

Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it

## Technical Datasheet

# tasker® TSK 1050 CPR Cca – 2x0,35 mm<sup>2</sup> Low Capacity Balanced Microphone Cable – CPR Cca Class

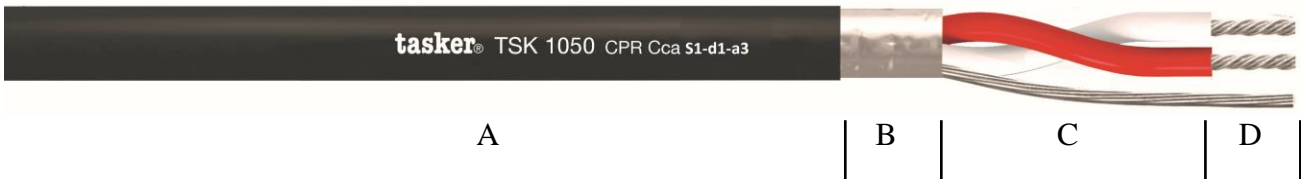

**CATEGORY** Balanced Microphone Cable (See News brochure)  
**APPLICATIONS** Audio and Microphone on Fix Installation

- A:** Black **L.S.Z.H.** Sheath.  
Outer cable Diam. Ø 6,20 (±0,20) mm.
- B:** Aluminum foil tape covering 100% + Stranded tinned copper drain wire
- C:** Cores insulation in **L.S.Z.H.**, colored one red and one white.
- D:** Diam. Ø 1,80 (±0,20) mm.
- E:** O.F. tinned copper formation 7x0,25 mm.  
Nom. Cross section 2x0,35 mm<sup>2</sup>.

**MARKING** **tasker®** TSK1050 CPR Cca - 2x0,35 mm<sup>2</sup> – Microphone Cable -  
 0987-CPR-723 – Cca – s1– d1–a3 – FirestoP® - Halogen Free  
 - Made in Italy

### Cable Properties

<b>Conductor Resistance</b>	56,50 Ω/Km
<b>Capacity Core/Core</b>	55 pF/m
<b>Capacity Core/Shield</b>	92 pF/m
<b>Max Rated Voltage</b>	49 V
<b>Operative Temperature</b>	-20/+70°C

<b>USE</b>	<b>X</b>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<b>X</b>	Fixed	Fissa	<b>INFORMATION</b>	<b>X</b>	RoHS2 Compliant
<b>Impiego</b>	<b>X</b>	Outdoor Limited	Esterno Limitato	<b>Posa</b>		Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<b>X</b>	Ver. A / 05.09.22
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			