

MILAN S.r.l. a socio unico



**Head Office – Export department:**  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com


**Ufficio Commerciale e Centro Distribuzione**  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it


**Technical Datasheet**

**tasker® C223 – 2x35,00 mm<sup>2</sup>**

**Red & Black Flat Divisible Battery Cable**



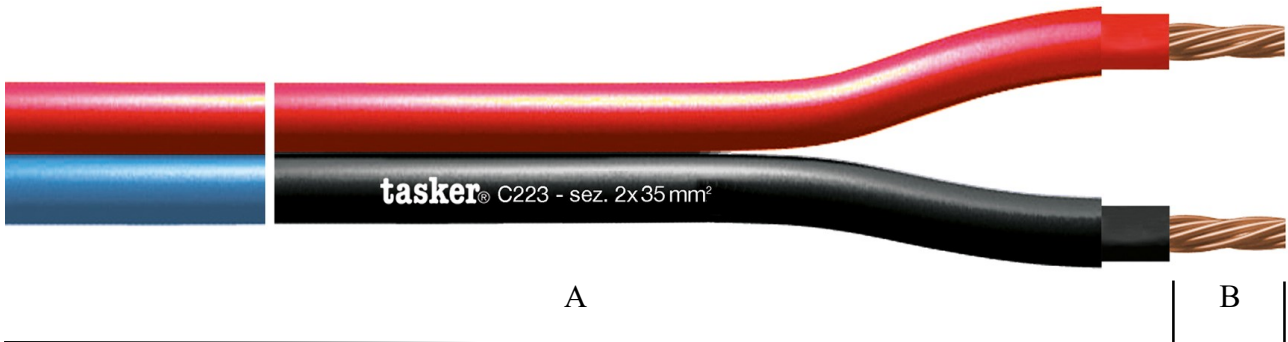

**CATEGORY** Flat Divisible Red and Black Cable  
**APPLICATIONS** Alimentation Battery cable


- A:** Transparent PVC outer sheath. Flame Retardant IEC60332-1-2.  
 Cores insulation with Red and Black PVC.  
 Outer cable dimension 12,30x26,00 (±0,20) mm.
- B:** Both conductors in O.F.C. Red Copper.  
 Stranded formation with 0,21 mm elementary wires.  
 Nominal cross section 2x35,00mm<sup>2</sup>.

**MARKING** 35 mm<sup>2</sup> CE

**Cable Properties**

<b>Conductor Resistance</b>	0,55 Ω/Km
<b>Min. Bendin Radius Fix</b>	6xO.D.
<b>Min. Bendin Radius Mobile</b>	3xO.D.
<b>Max Rated Voltage Vac</b>	450 V
<b>Max Rated Voltage Vdc</b>	750 V
<b>Test Voltage</b>	2500 V/15'
<b>Operative Temp. Fix</b>	-40/+85°C
<b>Operative Temp. Mobile</b>	-25/+85°C

**Section Drawing**

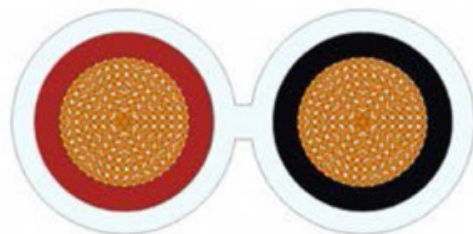

<b>USE</b>	X	Indoor	Interno Edificio	<b>INSTALLATION</b>	X	Fixed	Fissa	<b>INFORMATION</b>	X	RoHS2 Compliant
<b>Impiego</b>	X	Outdoor Limited	Esterno Limitato	<b>Posa</b>	X	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	X	Ver. A / 17.03.20
	X	Outdoor	Esterno		X	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			