

MILAN S.r.l. a socio unico


Head Office – Export department:  
 Viale Europa, 74  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.4556-4158  
 F. +39 02 9039.4551  
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione  
 Viale Europa 72 Strada F12  
 20090 Cusago (MI) Italy  
 T. +39 02 9039.0037-0059  
 F. +39 02 9039.0049  
 www.tasker.it



## Technical Datasheet

# tasker® C862 PVC – 2x2x0,35 mm<sup>2</sup> DMX512 110 Ohm Cable

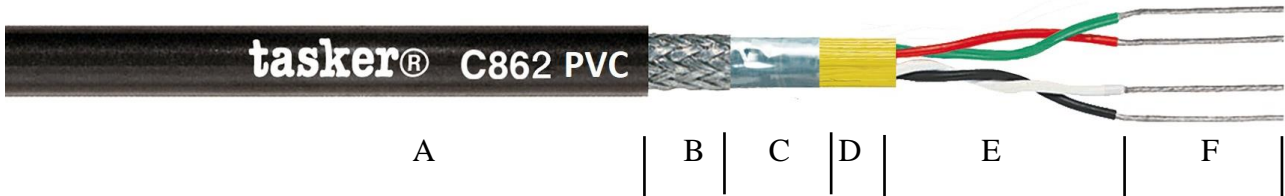

**CATEGORY** Special Production DMX Cable  
**APPLICATIONS** DMX control and lights

- A:** Black PVC tubular sheath.  
Outer Diam. Ø 7,50 (±0,20) mm.
- B:** First Shielding in O.F.C. tinned copper Braid covering 85%
- C:** Second Shielding with aluminum foil tape covering 100%
- D:** Kevlar fiber filler between conductors.
- E:** Core Insulation in Foam PE.  
Pairs Color code: Red-Green, White-Black.  
Core Diam. Ø 1,52 (±0,20) mm.
- F:** O.F.C. tinned copper stranded formation 19x0,16 mm.  
Nominal cross section 2x2x0,35 mm<sup>2</sup>.

**MARKING** tasker® C862 PVC - 2x2x0,35 mm<sup>2</sup> - O.F.C. ProFLEX Digital 110 Ω DMX Cable - Made in Italy

**CUSTOM PRODUCTION** This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR,** or Metallic Armored.

### Cable Properties

<b>Conductor Resistance</b>	59,40 Ω/Km
<b>Impedance</b>	110 Ω
<b>Test Voltage</b>	1500 V/1 Min.
<b>Max Rated Voltage</b>	49 V
<b>Min. Bending Radius</b>	15 x O.D.
<b>Operative Temperature</b>	-15/+70°C

<b>USE</b>	<input checked="" type="checkbox"/>	Indoor	Interno Edificio	<b>INSTALLATION</b>	<input checked="" type="checkbox"/>	Fixed	Fissa	<b>INFORMATION</b>	<input checked="" type="checkbox"/>	RoHS3 Compliant
<b>Impiego</b>		Outdoor Limited	Esterno Limitato	<b>Posa</b>	<input checked="" type="checkbox"/>	Restricted Mobile	Mobile Limitata	<b>Informazioni</b>	<input checked="" type="checkbox"/>	Ver. A / 12.07.2023
		Outdoor	Esterno		<input checked="" type="checkbox"/>	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			